



### A STEP ABOVE

Easy Access is NZ's leading supplier of height access equipment. We're a manufacturer, importer, and supplier of height access equipment for the DIY, professional and tradie here and across the world.

Our commitment is to support our customers with safe and compliant solutions for efficiently working at height. Our Kiwi, can-do roots, combined with the scale provided by our export markets, allows us to respond quickly to our customers' needs. The power of our inhouse design and production resources behind us keeps us ahead of global trends and means that we can quickly adapt to any standards and compliance requirements in the access industry.

Our range will continue to evolve as we improve and enhance it, through the addition of new products and innovations to existing ones.

What makes us different is our steadfast belief in our values of innovation, integrity, courage and people.



#### INNOVATION

We strive for excellence We're problem solvers, we'll find solutions and continuously improve

We'll keep looking for creative ways to be better, faster, smarter, and more efficient



#### INTEGRITY

We do what we say, and say what we mean

We're trustworthy and you can count on our people and products

We'll demonstrate respect and trust.



#### COURAGE

We're bold, brave, and open – courage gives us power

We're not afraid to be challenged and to challenge the status quo We're open and resilient.



#### PEOPLE FIRST

We put people first, caring for safety and wellbeing

We're focused on delivering an easy, seamless experience

We demonstrate transparency and value effective communication.






### STORE SUPPORT

Easy Access's store support programme is run by our expert customer care team. We will regularly visit your store and offer the following support to you and your end user customers.

Instore training on Easy Access products and height access safety compliance requirements.

- Instore signage, display products and merchandising support.
- Representation at, and active contribution to instore promotional events.
- Advice and assistance with ascertaining the specific needs of individual customers.
- On-site consultation, training and product demos with end user customers.
- Instore training at customer events, supported by printed training resources, and certificates for successful completion by participants.
- Regular promotions for stores to offer customers seasonal special deals on Easy Access products.
- Participation in the annual Easy Access blockbuster promotion with high value giveaways driving customers into store.



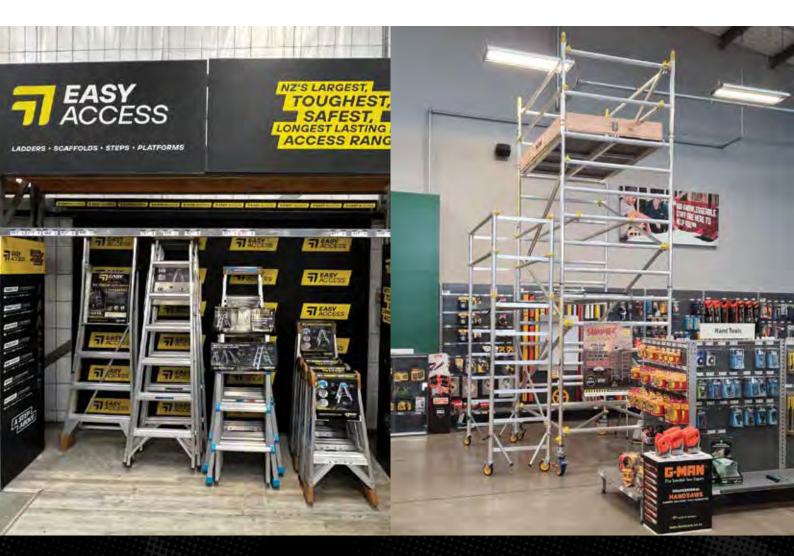

### **OUR RANGE**



### **SCAFFOLDS**

Easy Access offers NZ's widest selection of mobile scaffolds, with five main product ranges. From compact options for tight spaces to large, heavy-duty setups for major works. Designed and manufactured in NZ, our scaffolds are strong, versatile, and user-friendly. Modular, height-adjustable, and with add-on packs available for ultimate versatility, Easy Access has a mobile scaffold for every application!



# 2

### **LADDERS**

Easy Access offers NZ's widest, strongest & longest-lasting range of ladders, with three main product ranges to choose from. Built for the trade we have lightweight models to the strongest, most robust ladders in the world. Available in aluminium and fibreglass, and rated up to a massive AS/NZS 1892.1 200kg load rating, there's a ladder for every application.





### WORK PLATFORMS, TRESTLES AND PLANKS

Work platforms, planks and trestles create quick and easy access for low level work. A range of heights and widths are available, along with a height adjustable option.





### ROOF EDGE / PLATFORM ACCESS SYSTEMS

Easy Access' range of roof edge protection modular is very fast to install. It utilizes a cantilever bracket system and is available in 4 standard post heights. It is the ultimate in low level roof edge protection.



# 5

### **RETEX**

Retex is the future of building surface protection. Made in NZ from recycled textiles, it's 100% sustainable and can be recycled indefinitely. Cost-effective and reusable multiple times, Retex suits many applications with superior flexibility, acoustic properties, and easy handling for floors, walls, joinery, scaffolds, and more.







## EASY ACCESS HAS BEEN MANUFACTURING RIGHT HERE IN NEW ZEALAND SINCE 1999

# LOOK FOR THIS LOGO TO FIND PRODUCTS MADE IN NEW ZEALAND





### **CONTENTS**



### SCAFFOLDS SECTION 1

FOLDAWAY	PG 12 - 15
MINI MOBILE	PG 16 - 28
EASY SCAFF	PG 29 - 31
MOBI	PG 32 - 41
H-FRAME STEEL-BRACING	PG 42 - 52
H-FRAME SNAPLOCK-BRACING	PG 53 - 63
SCAFFOLD LADDERS & Z-STAIRS	PG 64



### LADDERS

#### SECTION 2

TRADELITE PG 70 - 73
TRADETOUGH PG 74 - 83
WARTHOG PG 84 - 90
LADDER ACCESSORIES PG 91 - 96



### **WORK PLATFORMS, TRESTLES & PLANKS**

#### **SECTION 3**

 STEP STOOLS
 PG 98 - 99

 SAWHORSES
 PG 100

 WORK PLATFORMS
 PG 101 - 103

 TRESTLES & PLANKS
 PG 104 - 106

 SUPER TRESTLES
 PG 107



### ROOF EDGE / PLATFORM ACCESS SYSTEMS

#### **SECTION 4**

EASYRAIL PG 110 - 113
EASYDECK PG 114 - 118
MINI MOBILE SAFEROOF PG 119
EASYREACH PG 123 - 127



### RETEX

### **SECTION 5**

RETEX SURFACE PROTECTION PG 128 - 129
RETEX MOVING BLANKET PG 130

### **SCAFFOLDS**

Easy Access offers NZ's widest selection of mobile scaffolds, with five main product ranges.

From compact options for tight spaces to large, heavy-duty setups for major works. Designed and primarily manufactured in NZ, our scaffolds are strong, versatile, and user-friendly. Modular, height-adjustable, and with add-on packs available for ultimate versatility, Easy Access has a mobile scaffold for every application!







# SCAFFOLDS SAFETY GUIDELINES



#### **TOEBOARDS**

Toeboards are required where an object can fall more than 2m.

#### **OUTRIGGERS**

Outriggers must be used when a mobile scaffold's height-to-width ratio exceeds 2:1 for scaffolds with a platform height of 2 metres or less, and when the ratio exceeds 3:1 for scaffolds with a platform height greater than 2 metres. All Easy Access full scaffold sets come with outriggers when they are required for compliance.

#### **PLAN BRACE**

A plan brace (diagonal bracing at the tower base) is essential for maintaining the horizontal integrity of mobile scaffolds. It is included as standard with the Easy Access EasyScaff, MOBI, and H-Frame ranges. For the Foldaway and Mini Mobile ranges, a platform serves as the plan brace.

#### **MOVING THE PLATFORM**

Mobile scaffolds must not be moved if anyone is on the platform.

#### **SCAFFOLDING TICKETS**

Towers with a design height of 5m or above must be erected by a qualified scaffolder.

### LOCKING CASTORS

Castor brakes must be engaged before use.

#### **FULL-SURROUND GUARDRAILS AND MIDRAILS**

Must be used when the platform is 1m or higher. (May be removed only when within 300mm of working face and 100mm for a non-working face). All guardrails required are included as standard with Easy Access Towers.

#### LADDER

Ladders on mobile scaffolds must provide access to the work platform from within the tower's footprint. Easy Access supplies scaffold ladders, and the H-Frame range includes a ladder as standard.

#### **ACCESS PLATFORM**

Scaffold towers must have a fully decked work platform. Easy Access double width towers have fixed and access platforms included as standard. Single width towers include an access platform as standard.

#### CHECK YOUR SCAFFOLD

Scaffolds should be checked for signs of damage or missing components every time they are assembled.

#### **SCAFFOLD TOWER**

The standard of compliance for scaffolds is AS/NZS 1576.

NB. Worksite requirements may vary, and may be more stringent than the legal requirement.





### WHAT SCAFFOLD RANGE **SHOULD I CHOOSE?**





UNMATCHED SPEED, COMPACT STORAGE & EASY OPERATION.





















TRUSTED BY TRADIES AS NZ'S MOST PRACTICAL AND LONG LASTING SMALL SCAFFOLD RANGE.

























COMPACT & COST-EFFECTIVE DOUBLE WIDTH SCAFFOLD RANGE. EASY SET-UP, EASY TO CLIMB, EASYSCAFF!























SMART DESIGN FOR DURABILITY, EASE OF USE & VERSATILITY!





























THE ORIGINAL, HEAVY DUTY, HIGHLY-ADAPTABLE & VERSATILE RANGE!
















REQUIRED FOR COMPLIANCE





sales@easyaccess.co.nz easyaccess.co.nz



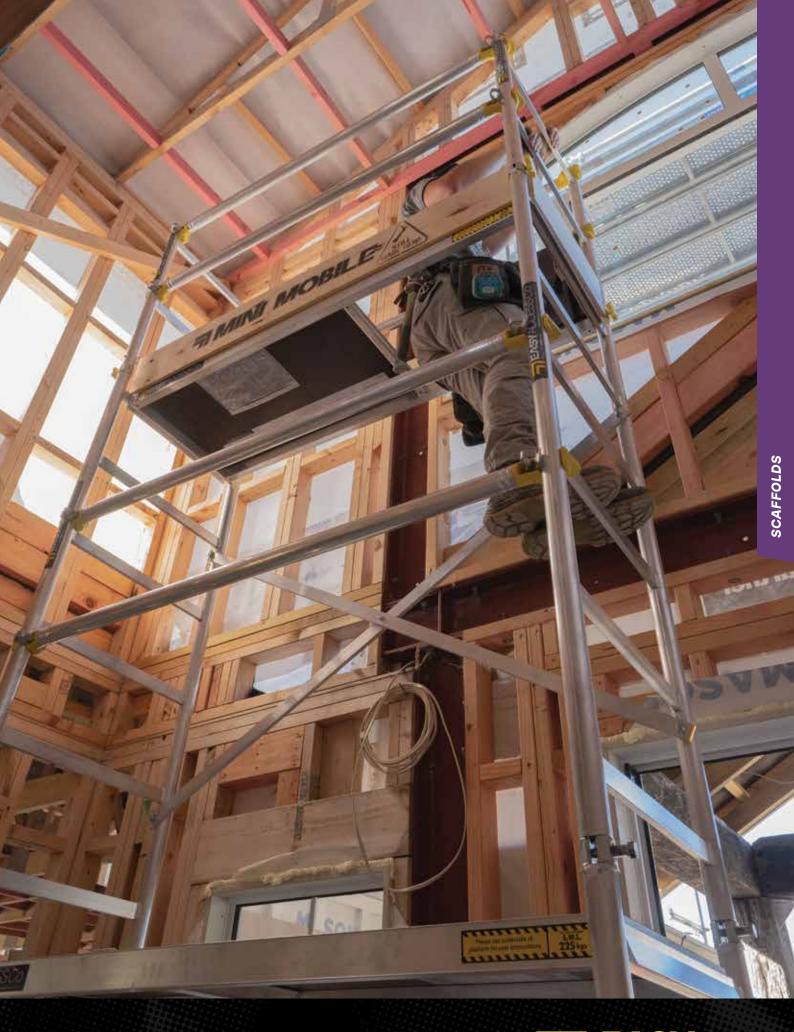



### **FOLD** AWAY



The Foldaway Scaffold Range is made in NZ and is reknown for fast-setup, offering ease of use, compact storage, and durability. With a 225kg load rating, it features a folding design for portability and speed, a welded frame, and an integrated ladder for space-saving. It's perfect for tight spaces and the Base Pack fits under a standard doorway. The Foldaway range is sold in packs however individual components can be purchased separately.



UNMATCHED SPEED, COMPACT STORAGE **& EASY OPERATION** 



NARROW WIDTH FITS BETWEEN DOORWAYS

**EASY STORAGE & RELOCATION FOLDS FLAT IN 1 PIECE** 



**COMPLIES TO** AS/NZS 1576

WELDED STRONG



225KG

LOAD RATING

### **FOLDAWAY RANGE**

- Introducing the Foldaway, NZs fastest and most convenient small mobile scaffold.
- Perfect for tradies, home DIYers and anyone who needs a fast, easy and efficient height access solution.
- Versatile enough for both indoor and outdoor use, the foldaway can be stored and transported with ease.
- Made from lightweight aluminium for easy manoeuvrability and rated for up to 225kg.
- A range of accessories can be added to your Foldaway purchase to ensure this scaffold is site compliant (for professional work sites). Once you've used the Foldaway, it's simple to disassemble and fold away for easy storing. This may suggest where we got the name from, the Foldaway is compact and fast with the end frames and folding side brace being one piece. Side clip on guardrails and a an access platform come as standard with the base pack.











14


sales@easyaccess.co.nz easyaccess.co.nz



### FOLDAWAY RANGE SCAFFOLD BASE PACK, GUARDRAIL PACK & UPPER PACK

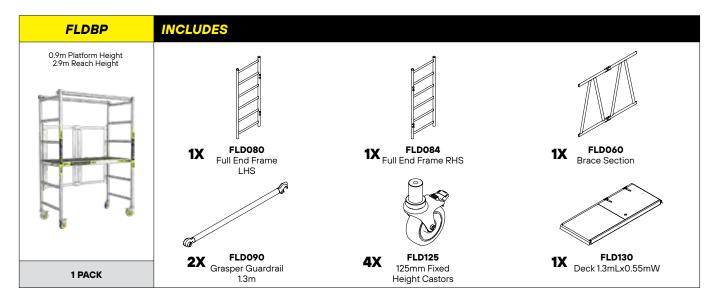

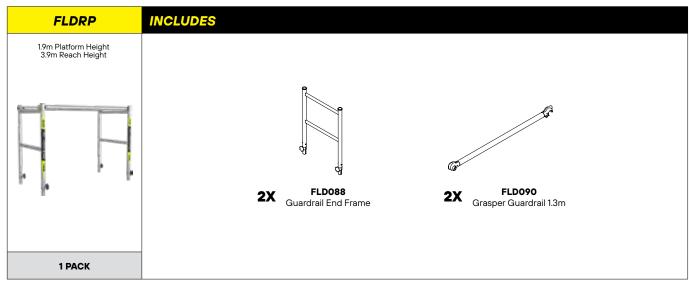

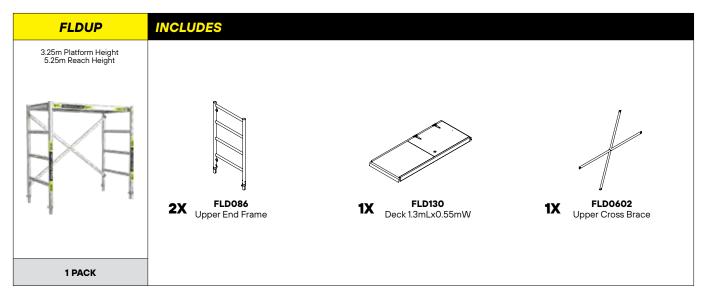

### **MINI** MOBILE



Made in NZ, the MiniMobile range by Easy Access is a popular NZ minor scaffold range, renowned for practicality and versatility. MiniMobiles are designed with a narrow 700mm width, to fit through doorways, are easy to set up, and feature a unique channel locking platform for added stability. Lightweight, strong, and versatile, the MiniMobile range is ideal for indoor and tight-access areas, with the ability to reach up to 5.7m. With add-on packs available and backed by a lifetime warranty, it's the go-to choice for professionals seeking a simple, efficient mobile scaffold solution.



TRUSTED BY TRADIES
AS NZ'S MOST PRACTICAL
& LONG LASTING
SMALL SCAFFOLD RANGE



225KG

LOAD RATING





UNIQUE CHANNEL LOCKING PLATFORM

SIMPLE QUICK SETUP



COMPLIES TO AS/NZS 1576



OUTRIGGERS & TOEBOARDS INCLUDED REQUIRED FOR COMPLIANCE

0800 394 222

sales@easyaccess.co.nz easyaccess.co.nz





### **ALUMINIUM MINI MOBILE SCAFFOLD 1.7M LONG SERIES**

### **FEATURES & BENEFITS**

- 1.7m(L) x700mm(W)
- Perfect for indoor use & tight access
- Unique channel locking platform
- The most popular minor scaffold in NZ!
- Minimal bracing needed, reducing assembly time
- Quick to erect with 1 person
- Open sided for unobstructed access to hatch platform
- Rungs are built in to the frame




COMPLIES TO AS/NZS 1576

"The MiniMobile Scaffolds are really easy to set up. It only takes 1-2mins and you can do it by yourself. The smallest model fits under a door and you can go right up to reaching around 7m high."

225KG


Nathan Reynolds Fortified Construction

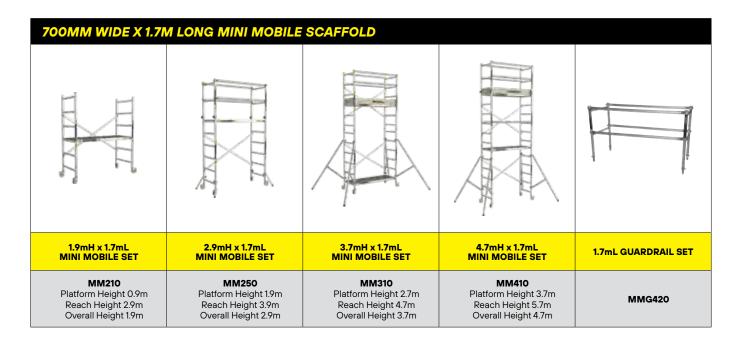




### SCAFFOLDS


### MINI MOBILE

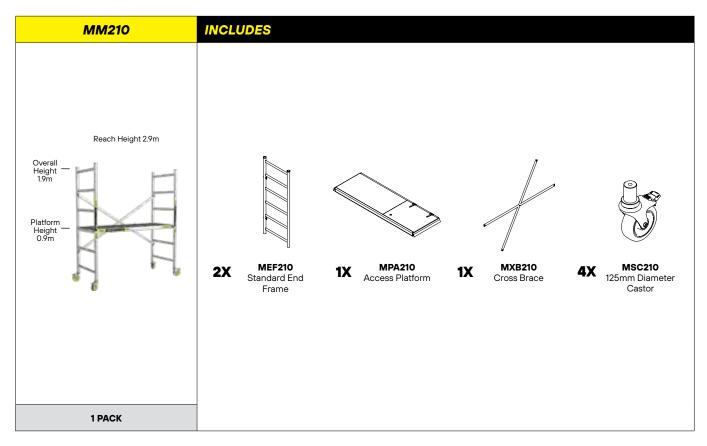


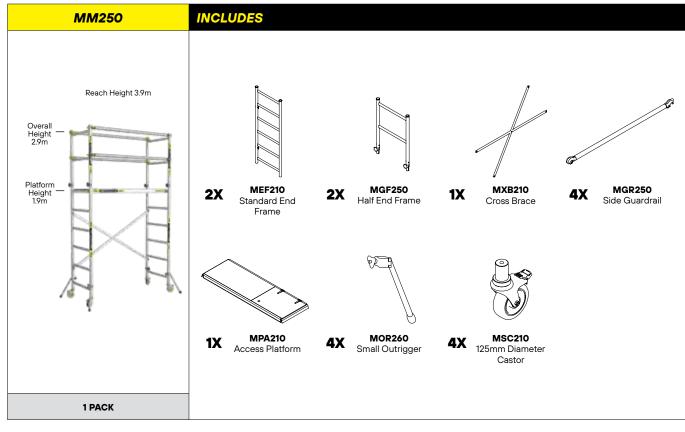




### ALUMINIUM MINI MOBILE SCAFFOLD 700MM WIDE X 1.7M LONG MINI MOBILE SCAFFOLD

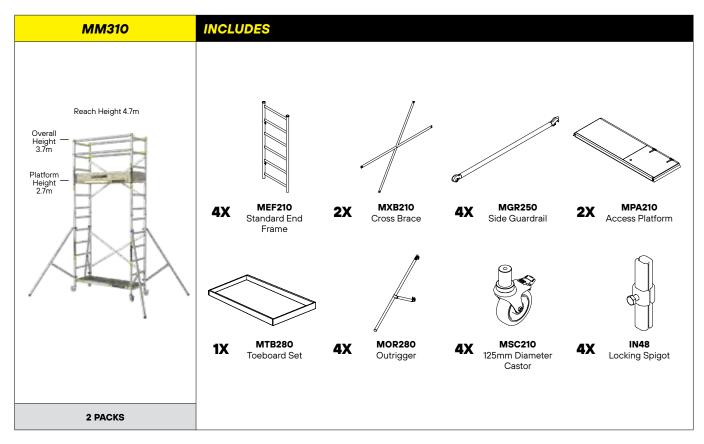

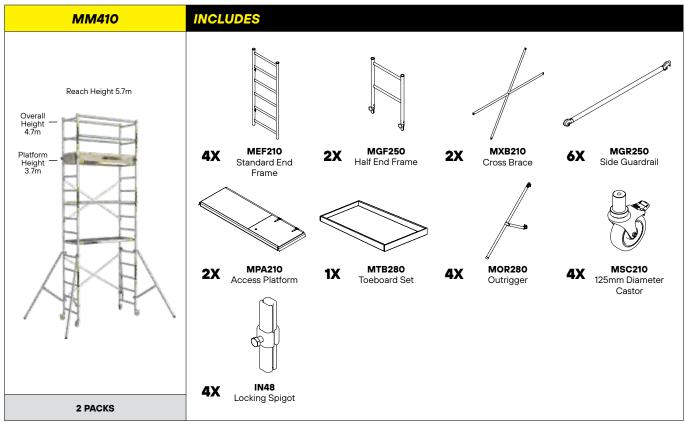

### **MINI** MOBILE

### EXTENSION PACK FOR THE MINI MOBILE TOWER CONVERTS AN MM250 INTO A MM410

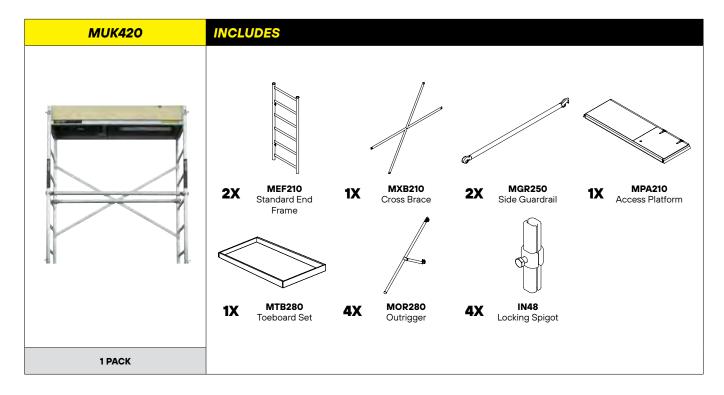





### **ALUMINIUM MINI MOBILE SCAFFOLD - 3.0M LONG SERIES**

#### **FEATURES & BENEFITS**

- 3.0m long x 700mm wide
- Scaffolds long areas fast just as fast as trestles and planks but much easier to move
- Versatile and safe to work off
- Clips together up to 3.7m high in 4 minutes
- Easily erected by one person
- Rungs are built into the frame
- Separate access ladder available on MM413 models if required





COMPLIES TO AS/NZS 1576

"MiniMobiles are a fantastic kit. Have owned it for ten years and I'd say it's still as good as the day I got it."

Levi











### SCAFFOLDS


### **MINI** MOBILE

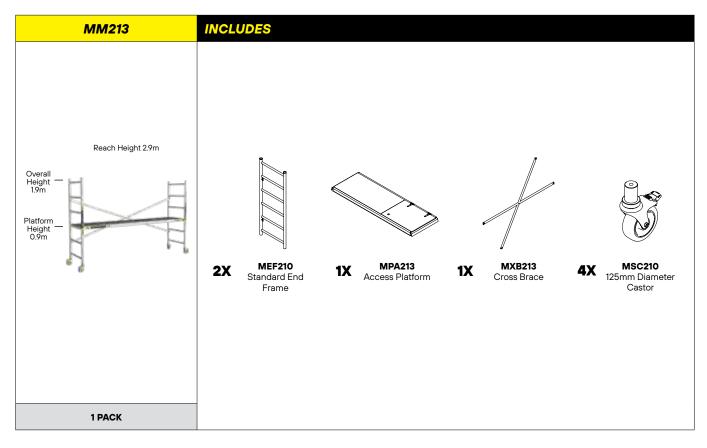


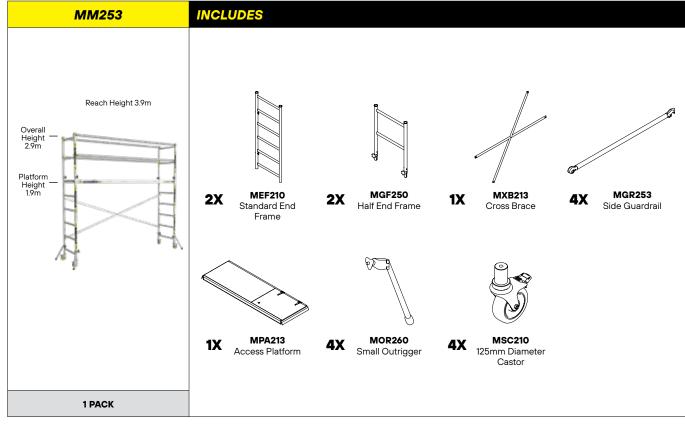



### ALUMINIUM MINI MOBILE SCAFFOLD 700MM WIDE X 3.0M LONG MINI MOBILE SCAFFOLD

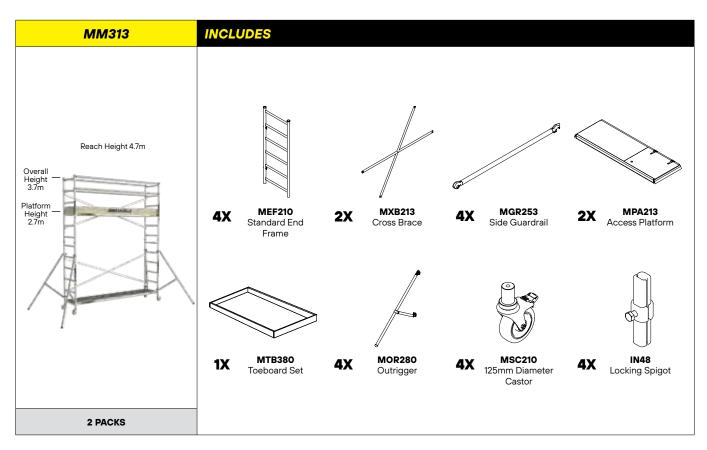

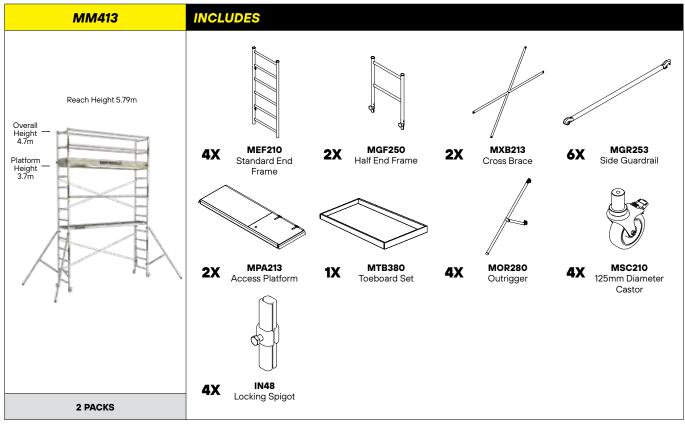

### **MINI** MOBILE

### MINI MOBILE EXPANSION SCAFFOLD - ALL TERRAIN STAIR PACK

### **FEATURES & BENEFITS**

- 700mm width allows access up stairs while the scaffold is in use
- Ideal for painters and other trades that use stairwells
- Suits stairs, slopes & uneven ground
- Safe & simple access to stairwells allowing a person to access a standard stairway past the tower when it is in use as shown
- 1200mm of adjustment allows for most gradients
- Adjustable height castors (MAC220) available for extra adjustment, two are required for use with the all-terrain pack (Castors are not supplied as part of the pack - see page 27 for components list)

Note: the all-terrain pack must be ordered separately to the scaffolds



CODE	DESCRIPTION	SERIES
MAT170	Diagonal brace & adjustable end frame to fit 1.7m series	1700
MAT300 Diagonal brace & adjustable end frame to fit 3.0m series		3000
MAC220	Adjustable Castor 250mm of adjustment	












### MINI MOBILE SCAFFOLD WIDE BOARD EXTENSION SET

#### **FEATURES & BENEFITS**

- Joins any 2 MiniMobiles side by side
- The set includes 1x Wideboard, 2x Joining Handrails and 2x Ledgers
- Triple the work surface in seconds
- Perfect for ceiling work







CODE	DESCRIPTION	LENGTH
MWP170	1.7m Long Wideboard Pack, includes Handrail & Ledgers	1.7m
MWP300	3.0m Long Wideboard Pack, includes Handrail & Ledgers	3.0m




### MINI MOBILE SCAFFOLD CORNER EXTENSION SET

#### **FEATURES & BENEFITS**

- Allows unobstructed decking around left and right corners
- Can be fitted with long boards and wide boards
- Attaches to the side of any 1.7m or 3m MiniMobile





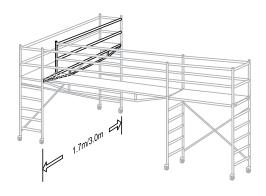

CODE	DESCRIPTION	LENGTH
MCP170	Fits 1.7m Multi-Mobile, 1x trussed Ledger and 1x 'F' guardrail	1.7m
MCP300	Fits 3.0m Multi-Mobile, 1x trussed Ledger and 1x 'F' guardrail	3.0m



### MINI MOBILE

### MINI MOBILE SCAFFOLD LONG BOARD EXTENSION SET


#### **FEATURES & BENEFITS**

- Joins any two mini mobiles end to end
- Includes 1 longboard, 1 handrail & two single posts
- Spans range from 3 6m
- Fast setup over obstacles
- Guardrails can be attached on either side if the scaffold is further than 300mm from a working face
- A second handrail/post set can be added if required



### COMPLIES TO AS/NZS 1576

CODE	DESCRIPTION	LENGTH
MLP300	3m Long, includes 2x Guardrail Posts	3.0m
MLP400	4m Long, includes 2x Guardrail Posts	4.0m
MLP500	5m Long, includes 2x Guardrail Posts	5.0m
MLP600	6m Long, includes 2x Guardrail Posts	6.0m

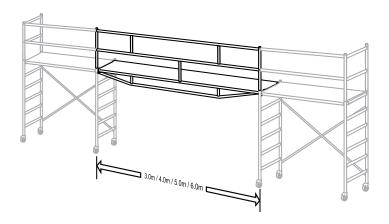




### **MULTI MOBILE AND SAFEROOF BASIC COMPONENTS**

STANDARI	CASTORS	ADJUSTABLE CASTORS		END FRAM	E
				CODE	DESCRIPTION
				MEF210	End Frame
CODE	DESCRIPTION	CODE	DESCRIPTION	MGF250	Guardrail End Frame
MSC210	125mm Diameter Castor	MAC220	125mm Diameter Castor Adjustable through 250mm	MMQUART	Quarter End Frame
CROSS BR	ACE	ACCESS P	LATFORM	GUARDRAI	L POST
				platform su	o the inner sleeve on the upport bracket where the dge is greater than 225mm the wall.
CODE	DESCRIPTION	CODE	DESCRIPTION		3
MXB210	1.7m Cross Brace	MPA210	1.7m Access Platform	CODE	DESCRIPTION
MXB213	3.0m Cross Brace	MPA213	3.0m Access Platform	MHP	Guardrail Post
TOEBOARI	)	OUTRIGGE	RS	GRAVITY L	ATCH
				(	
CODE	DESCRIPTION	CODE	DESCRIPTION		
MTB280	1.7m Toeboard Set	MOR280	1800mm Outrigger	CODE	DESCRIPTION
MTB380	3.0m Toeboard Set	MOR260	400mm Outrigger	MMGRAVITY	Anti Luce Nut
GUARDRAIL		LOCKING SPIGOT		MMSRP200 SAFEROOF PACK	
				CODE	DESCRIPTION
CODE	DESCRIPTION			CODE	DESCRIPTION
MGR250 MGR253	1.7m Side Guardrail	CODE	DESCRIPTION  Locking Spigot	500.06SW MMSRFRAME	Swivel Base Jack - Adjustable

### **MINI** MOBILE

### **MULTI MOBILE ADD-ON PACK COMPONENTS**

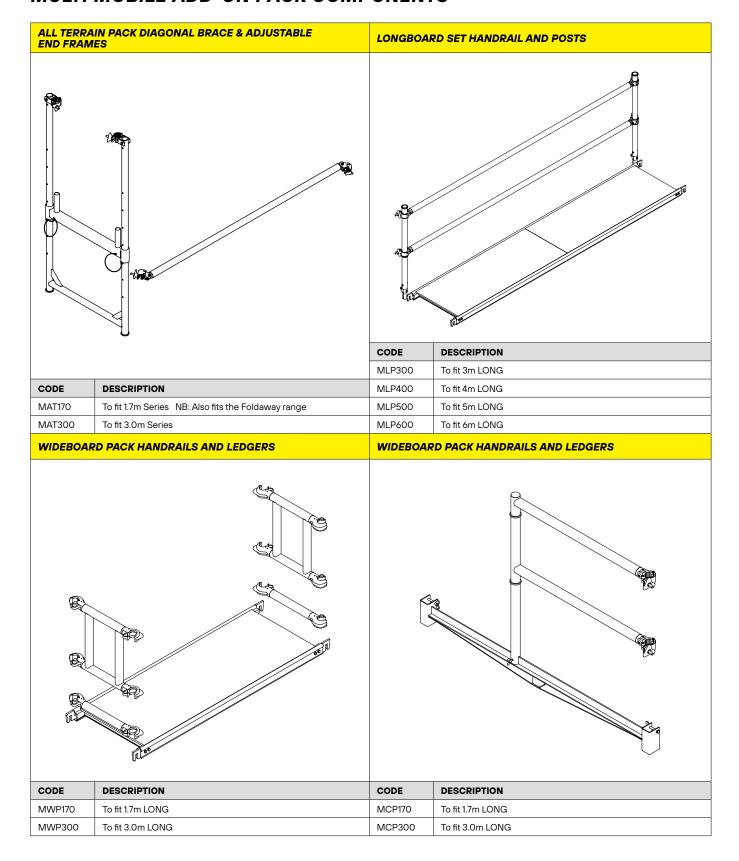




### **EASY** SCAFF





The EasyScaff range is a compact and cost-effective mobile scaffold system designed for quick setup and reliable performance. Available in four main sizes with a 1.8m length, it features integrated ladder frames, colour-coded components, welded lightweight aluminium construction, and heavy-duty height-adjustable wheels for stable use on any surface. Built for strength, simplicity, and everyday practicality, EasyScaff is the ideal choice for New Zealand builders who value efficiency and compliance on site.

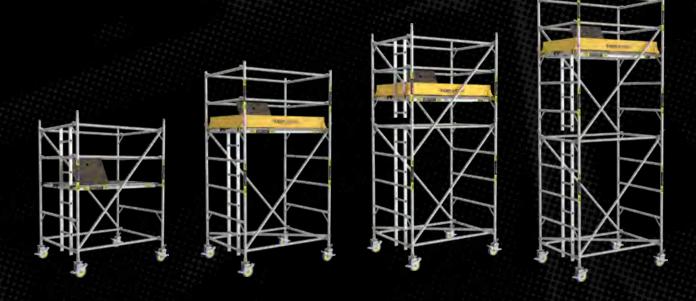

# COMPACT & COST-EFFECTIVE DOUBLE WIDTH SCAFFOLD RANGE EASY SET-UP, EASY TO CLIMB, EASYSCAFF!

COLOUR CODED BRACING

LADDER BUILT INTO FRAME 目





COMPLIES TO AS/NZS 1576









### **EASYSCAFF TOEBOARD**

• Toeboard not included in pack and can be purchased separately.

CODE	DESCRIPTION	DIMENSIONS
ESTB18	EasyScaff Toeboard Set	1400mmW x 1800mmL



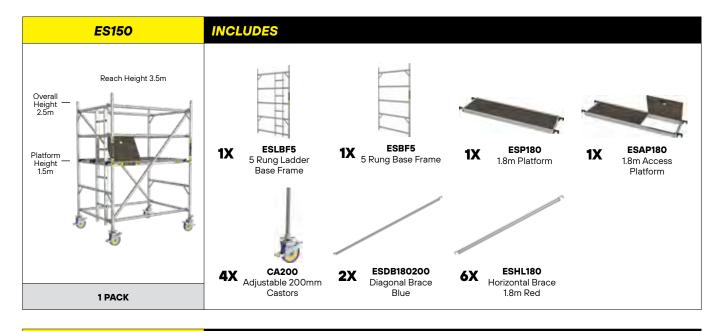

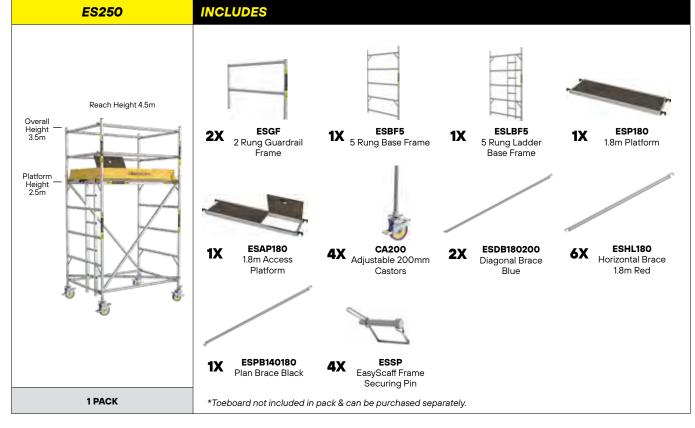



### ALUMINIUM MOBILE SCAFFOLD 1.4M WIDE X 2.5M LONG EASYSCAFF SCAFFOLD










Made in NZ, the Mobi range by Easy Access is the ultimate mobile scaffold, combining compact design with an impressive 450kg load rating per platform. Fast, strong, and user-friendly, Mobi features a robust welded frame with an integrated ladder and has colour-coded components for ease of set-up and maximum efficiency on the job. With a compact 2m length, the Mobi scaffolds are one of NZ's most user-friendly large mobile scaffolds. Fully welded, AS/NZS 1576.1 compliant, and backed by a limited lifetime warranty, it's the do-it-all mobile tower. Outriggers and toeboards are included for compliance. Add-on packs available for further customisation.

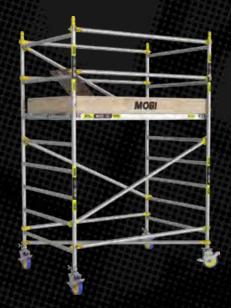





COLOUR CODED
SNAP-LOCK BRACING

LADDER BUILT INTO FRAME 目



MOBI



COMPLIES TO AS/NZS 1576 WELDED STRONG

OUTRIGGERS & TOEBOARDS INCLUDED
REQUIRED FOR COMPLIANCE

0800 394 222

sales@easyaccess.co.nz easyaccess.co.nz



450KG

LOAD RATING



### MOBI COMPACT H FRAME SCAFFOLD TOWER WITH SNAPLOCK ALUMINIUM BRACING

#### **FEATURES & BENEFITS**

- · Lightweight high tensile aluminium construction
- Simple colour coded componentry for user friendly erecting
- · Robust welded design for maximum durability
- Hardy 200mm diameter, fully braked, height adjustable castors (adjust through 350mm)
- Available in single (0.8m) or double (1.4m) widths
- Adjustable for use on a sloping support surface or stairway
- Outriggers included on selected models as required by 'working at heights' regulations
- Optional clip-on ladder available for all models\*
- Compact 2m long platform for easy transportation
- Individual components and add-on accessories available
- Huge 450Kg medium duty safe working load per tower
















### MOBI COMPACT MOBILE SCAFFOLD TOWER WITH SNAPLOCK ALUMINIUM BRACING

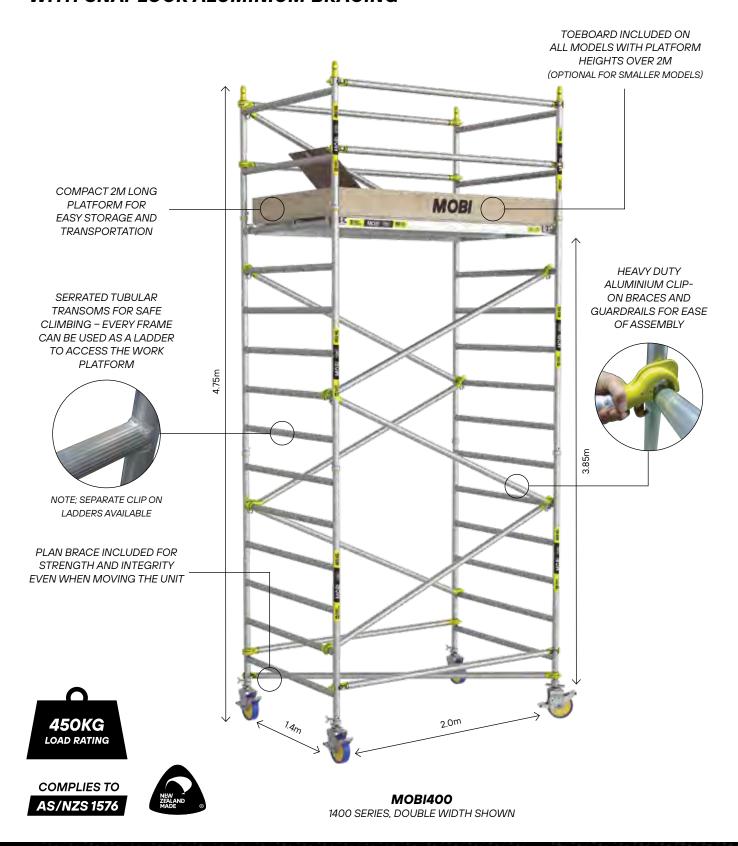





### MOBI 1400 SERIES DOUBLE WIDTH 1.4M X 2M LONG SCAFFOLD TOWERS

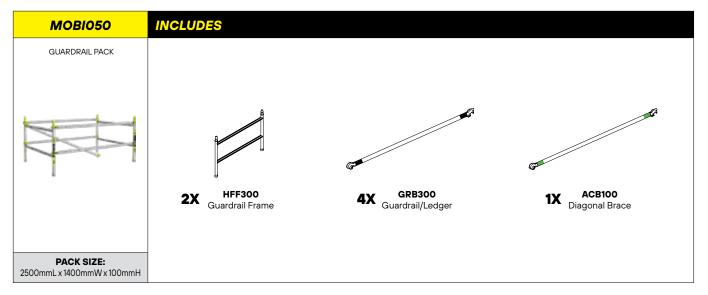


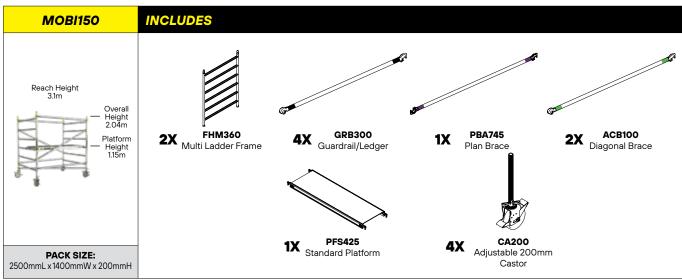


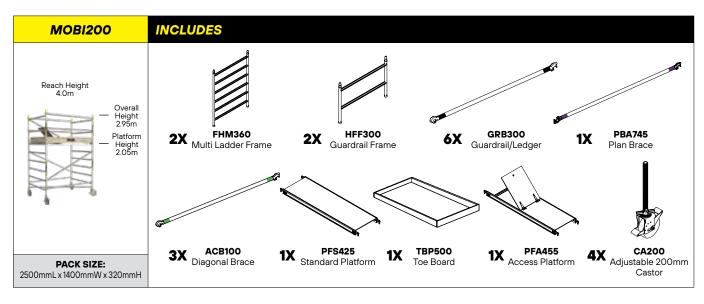

### SCAFFOLDS

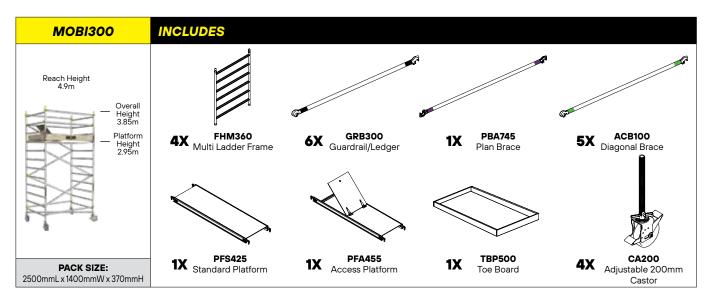


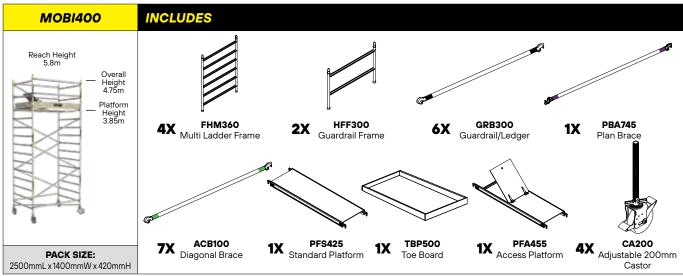


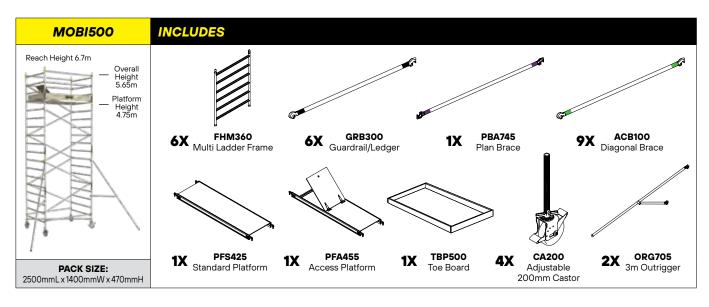






# MOBI 800 SERIES SINGLE WIDTH (0.8M) X 2M LONG SCAFFOLD TOWERS

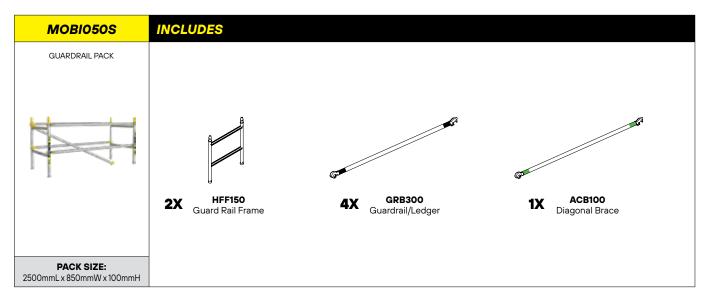


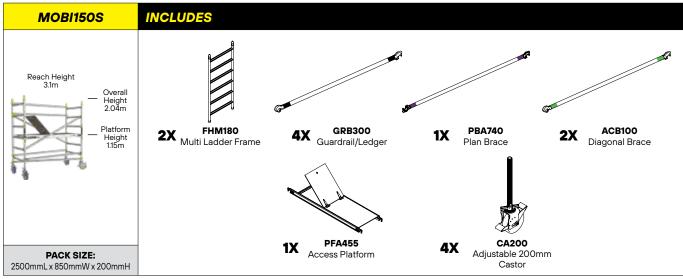

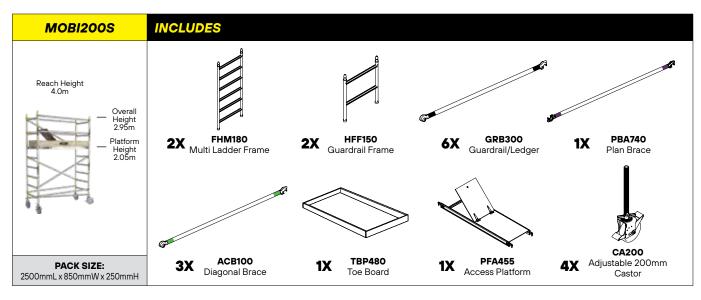

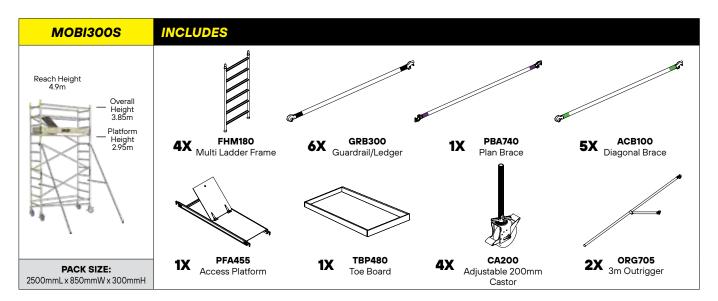

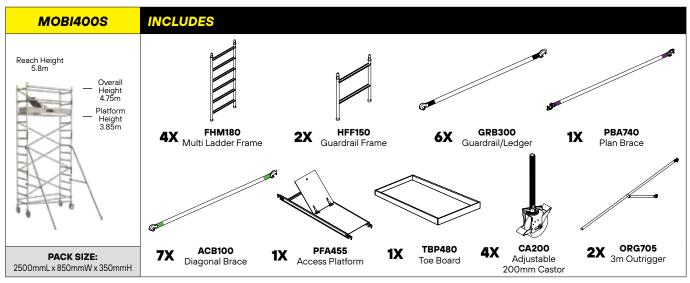

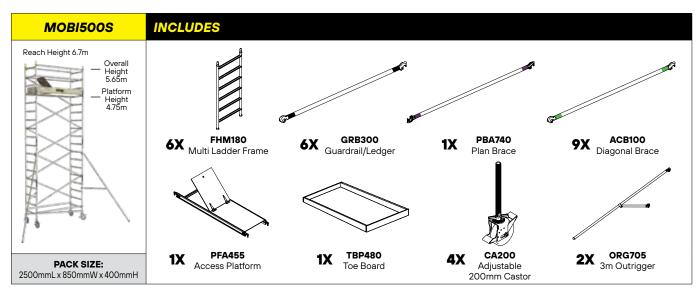




### MAKE YOUR MOBI WORK HARDER:

By adding modular Mobi components you can create multiple configurations for unmatched versatility









































### SINGLE WIDTH LONG SPAN MOBI BRIDGE

- Mobi F-Post allows for single width longspan bridge for up to 10 metres of uninterrupted access to work face
- 3m 6m long span platform, set up in minutes
- 225kg load rating
- Lightweight and easy to handle

CODE	DESCRIPTION	LENGTH
LSP300	3m Long Span Platform	3.0m
LSP400	4m Long Span Platform	4.0m
LSP500	5m Long Span Platform	5.0m
LSP600	6m Long Span Platform	6.0m
LSP250	MOBI Guardrail Single Post	
LSP200	MOBI F-Post	
LSH300	3m Long Handrails	3.0m
LSH400	4m Long Handrails	4.0m
LSH500	5m Long Handrails	5.0m
LSH600	6m Long Handrails	6.0m



F-POST allows you to have a single width bridge when using double width towers.





### **MOBI BASIC COMPONENTS**

ADJUSTAE	BLE CASTORS	MULTI LAD	DER FRAI	ΛE		GUARDRAIL FRAME		
CODE	DESCRIPTION	CODE	DESCRIP	TION		CODE	DESCRIPTION	
CA200	Adjustable 200mm Castor	FHM360	Multi Lado			HFF300	Guardrail Frame	
ACCESS P	PLATFORM	STANDARD	PLATFOR	2M		TOEBOAR	D	
		***			<b>3</b> •	<u></u>		
CODE	DESCRIPTION	CODE DESCRIP		TION		CODE	DESCRIPTION	
PFA455 Access Platform PFS425								
PFA455  OUTRIGGE		PFS425  GUARDRA	Standard			TBP500	Toe Board ACE	
	ERS		Standard			TBP500		
OUTRIGGE	ERS	GUARDRA	Standard			TBP500  PLAN BRA		
OUTRIGGE 6	ERS	GUARDRA	Standard	TION		TBP500  PLAN BRA	ACE	
CODE	DESCRIPTION  3m Outrigger	GUARDRA	Standard IL/LEDGER	TION		TBP500  PLAN BRA	DESCRIPTION	
CODE ORG705	DESCRIPTION  3m Outrigger	GUARDRA	Standard IL/LEDGER	TION Ledger		TBP500  PLAN BRA	DESCRIPTION	
CODE ORG705	DESCRIPTION 3m Outrigger L BRACE	CODE GRB300	Standard IL/LEDGER	TION Ledger	DESCRIP	CODE PBA745	DESCRIPTION	

# **H-**FRAME



Made in NZ, the H-Frame range is the ultimate choice in mobile scaffolding, offering maximum coverage, versatility, and durability. Rated to a huge 450kg, these heavy-duty towers come in single (0.8m) and double (1.37m) widths with platform lengths of 2.4m or 3.0m. Featuring two bracing options - snaplock and steel scissor - this fully welded range complies with AS/NZS 1576.1. With versatile add-on packs available, H-Frame is a go-to scaffold for tradies who demand reliability. Backed by a limited lifetime warranty, the H-Frame range offers superior quality for every job and includes outriggers & toeboards when required for compliance.



THE ORIGINAL. HEAVY DUTY,
HIGHLY-ADAPTABLE

& VERSATILE RANGE!



42

MAXIMUM COVERAGE
UP TO 3M LONG

2 BRACING OPTIONS
SNAP-LOCK & STEEL SCISSOR

LIMITED\*

LIFETIME

WARRANTY

COMPLIES TO AS/NZS 1576

450KG

LOAD RATING

WELDED STRONG

OUTRIGGERS & TOEBOARDS INCLUDED REQUIRED FOR COMPLIANCE










### INDUSTRIAL H-FRAME SCAFFOLD SYSTEMS WITH STEEL BRACING


#### **FEATURES & BENEFITS**

- · Large work surface for bigger jobs
- Can be used without stabilisers up to 2 levels
- · Simple componentry for user friendly erecting
- Robust design for durability with hard use
- Height adjustable 150mm 500kg rated castors
- Available in single width 0.8m and double width 1.37m
- Steel scissor bracing with quick and easy Anti-luce latches
- Available in 2.4m or 3.0m platform length
- Huge 450Kg medium duty safe working load per tower
- The toughest and most compliant tower system available in NZ

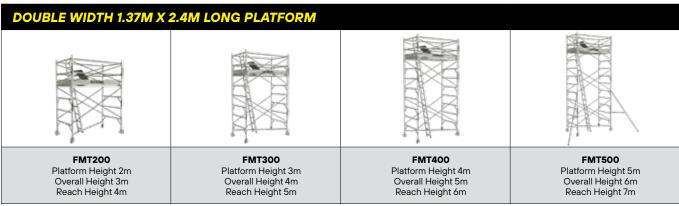

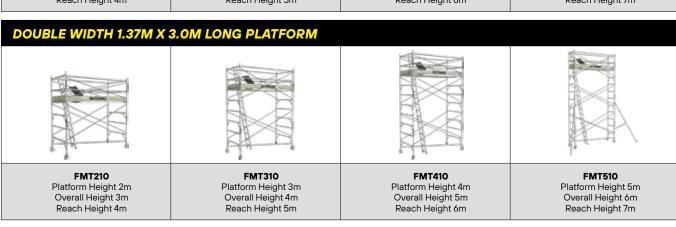


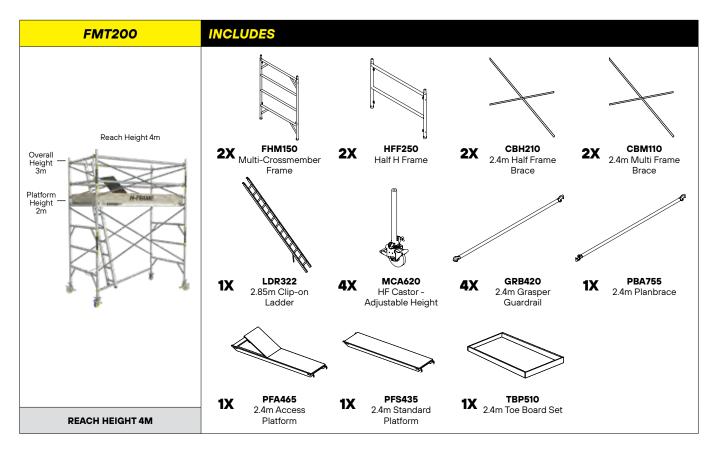


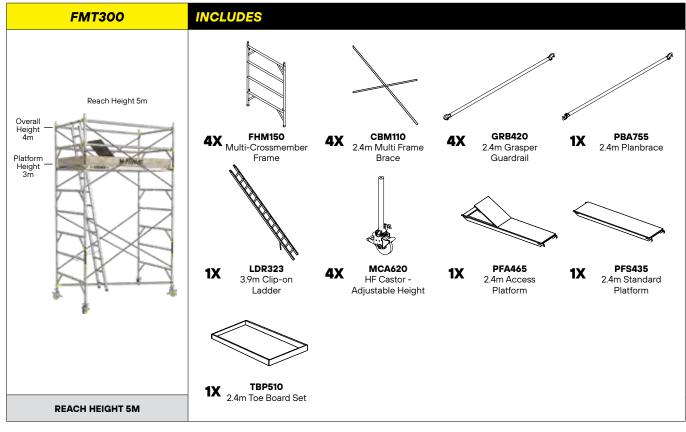





### INDUSTRIAL H-FRAME SCAFFOLD SYSTEMS DOUBLE WIDTH 1.37M X 2.4M LONG PLATFORM

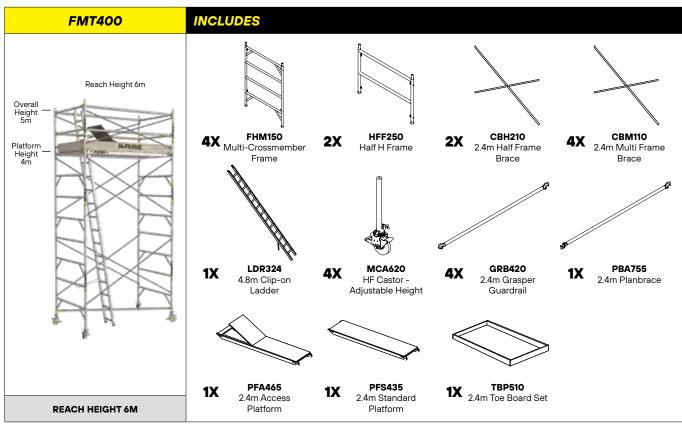


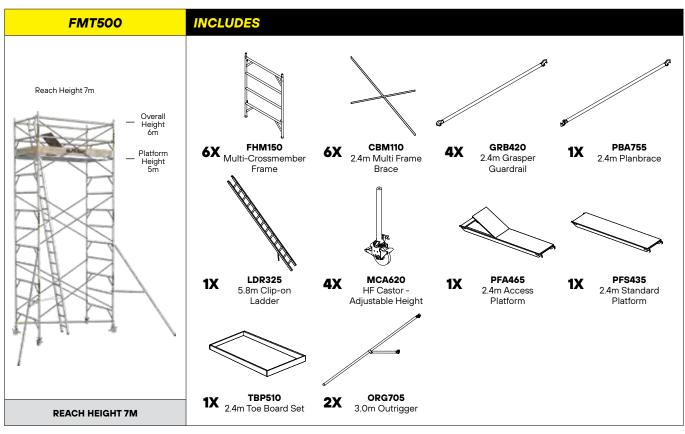


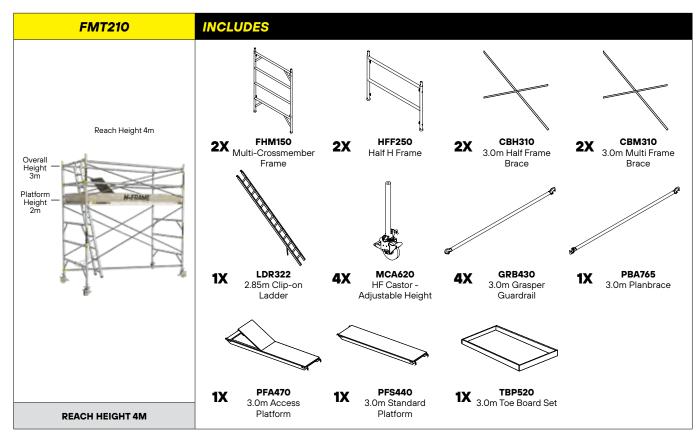

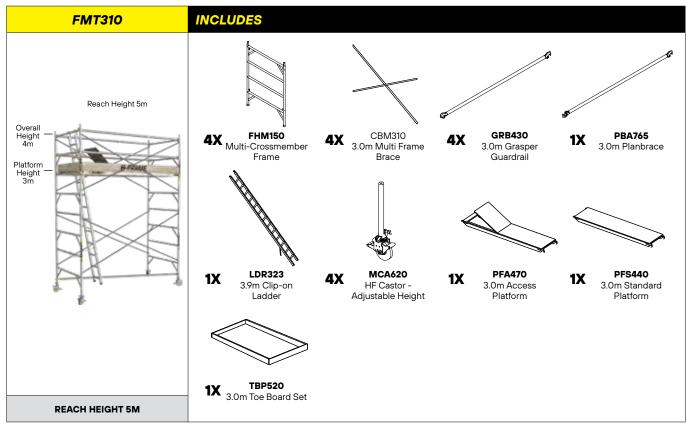

# INDUSTRIAL H-FRAME SCAFFOLD SYSTEMS DOUBLE WIDTH 1.37M X 3.0M LONG PLATFORM

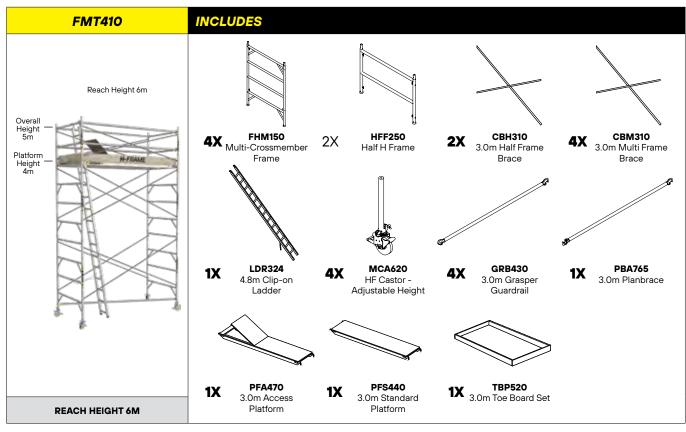

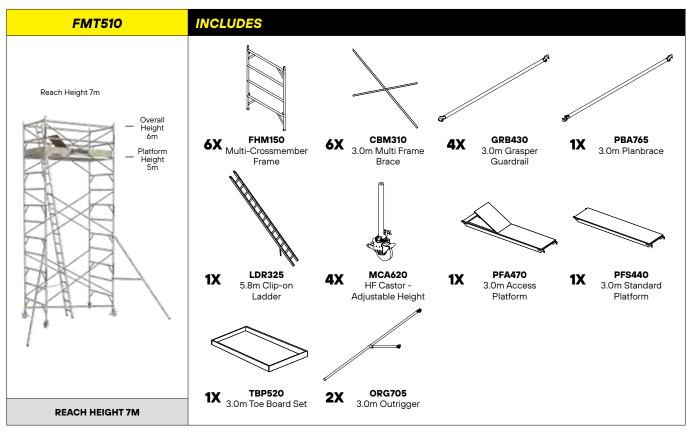

# H-FRAME





STEEL CROSS BRACING SECURED WITH ANTILUCE


**LATCHES** 







**COMPLIES TO** AS/NZS 1576




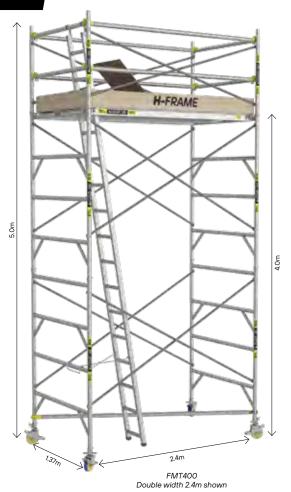


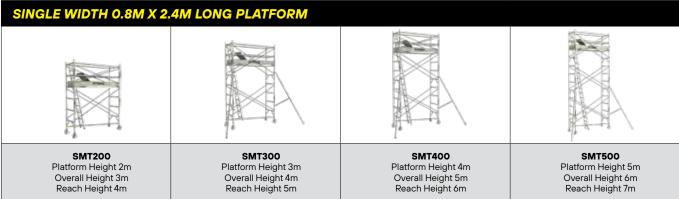


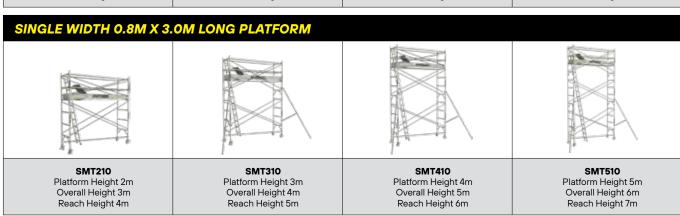


### INDUSTRIAL H-FRAME SCAFFOLD SYSTEMS DOUBLE WIDTH 1.37M X 2.4M LONG PLATFORM

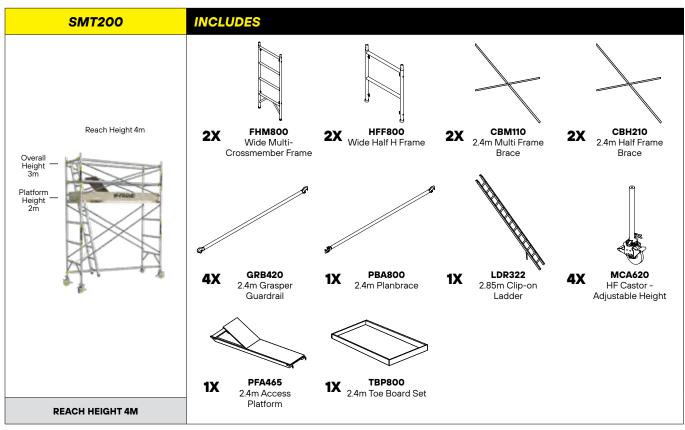


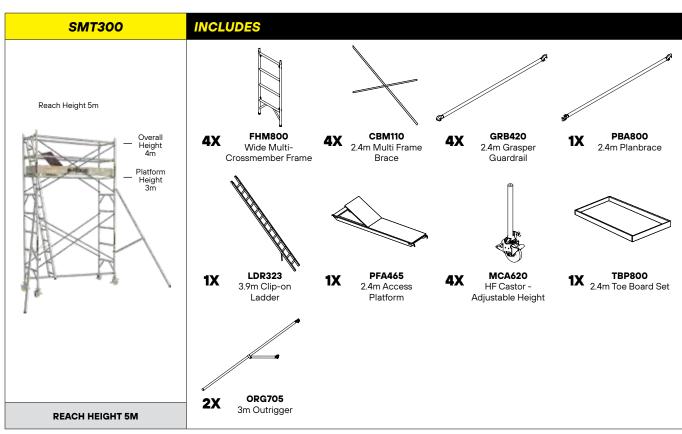


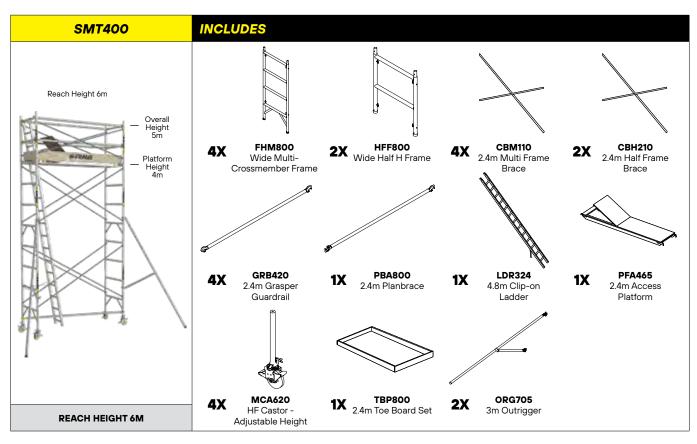


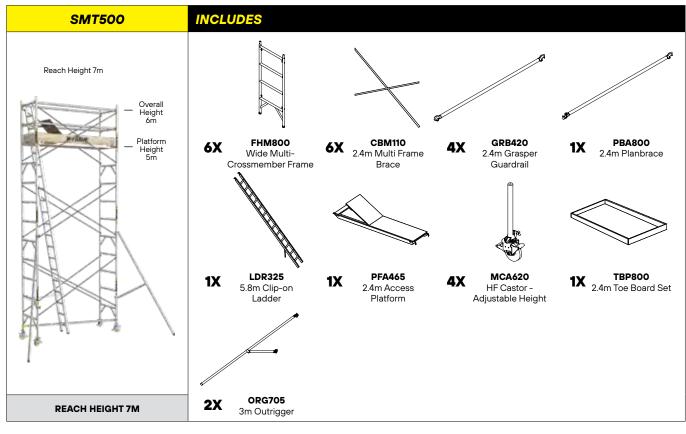


## INDUSTRIAL H-FRAME SCAFFOLD SYSTEMS SINGLE WIDTH 0.8M X 3.0M LONG PLATFORM

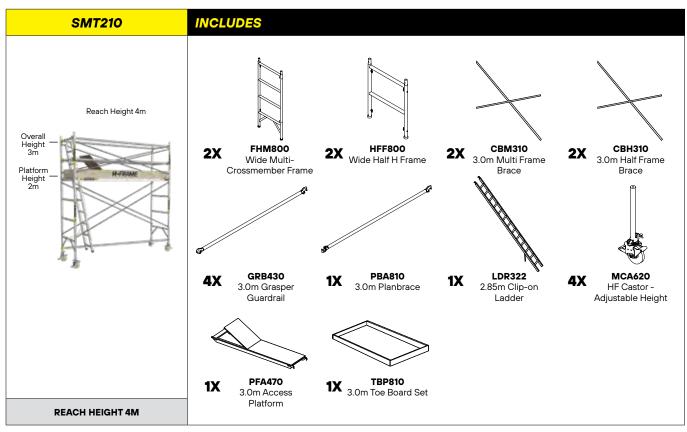

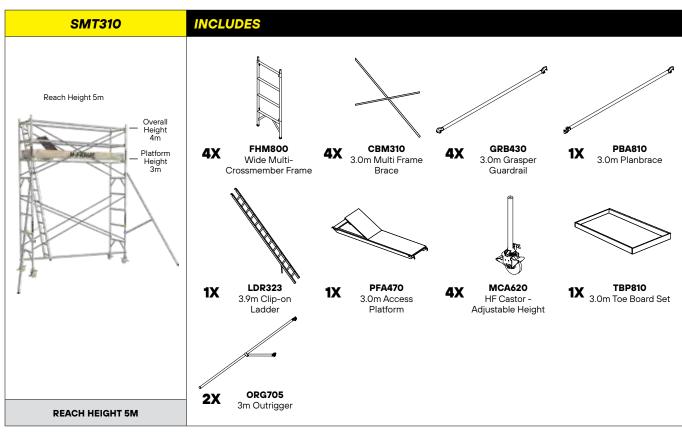

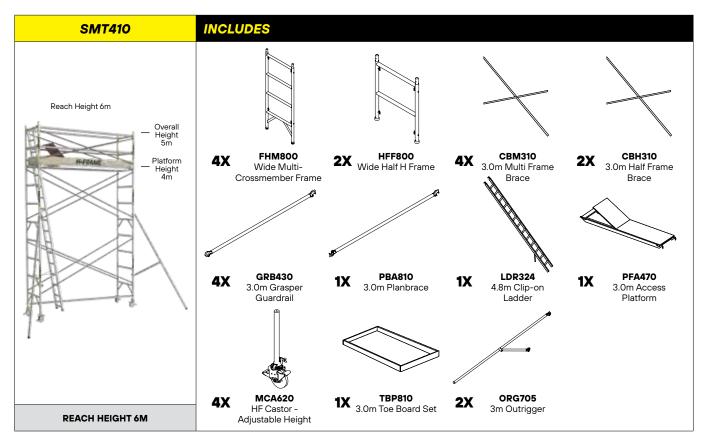

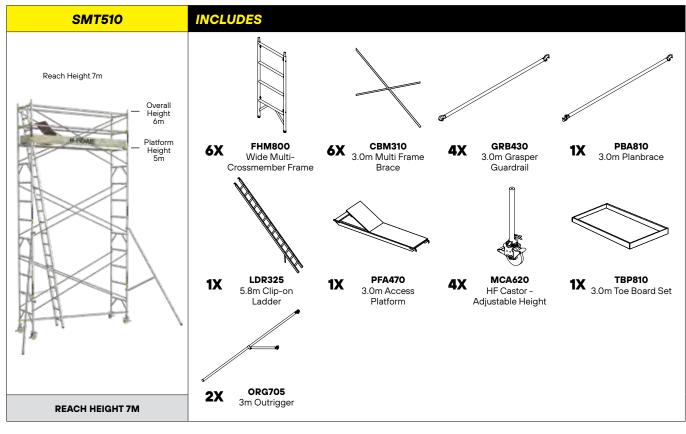




### INDUSTRIAL HEAVY DUTY H FRAME SCAFFOLD TOWERS WITH ALUMINIUM SNAPLOCK BRACING


#### **FEATURES & BENEFITS**


- Aluminium braces snap onto any cross member allowing frames to be set up on slopes and steps
- Extra large work surface for efficient access
- Can be used without stabilisers up to two levels
- · Sturdy and stable to work off

- Height adjustable 150mm diameter castors
- Extra robust, thick walled aluminium for durability with hard use
- Colour coded braces for easy identification
- Available in single width 0.8m and double width 1.37m
- Available in 2.4m or 3.0m platform length

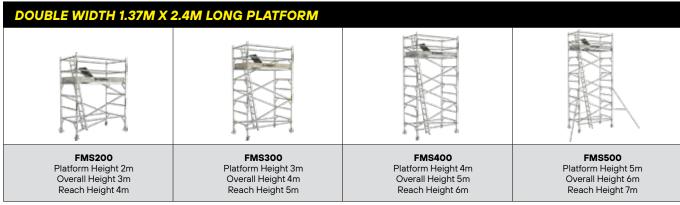




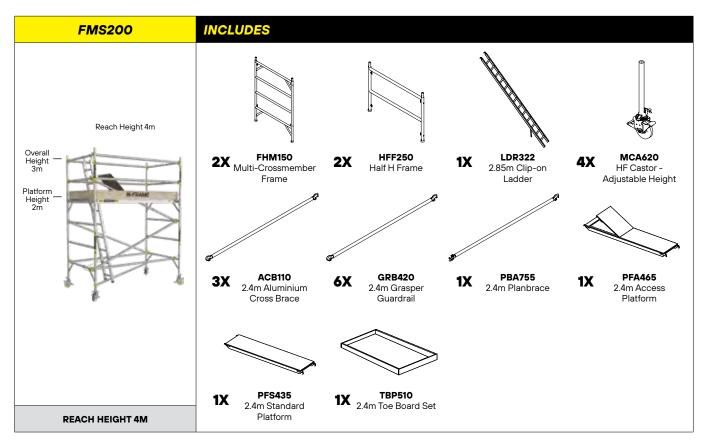


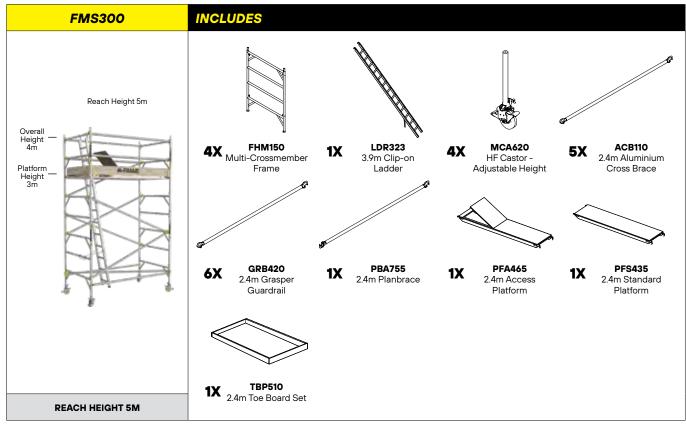





## INDUSTRIAL HEAVY DUTY H FRAME SCAFFOLD TOWERS DOUBLE WIDTH 1.37M X 2.4M LONG PLATFORM

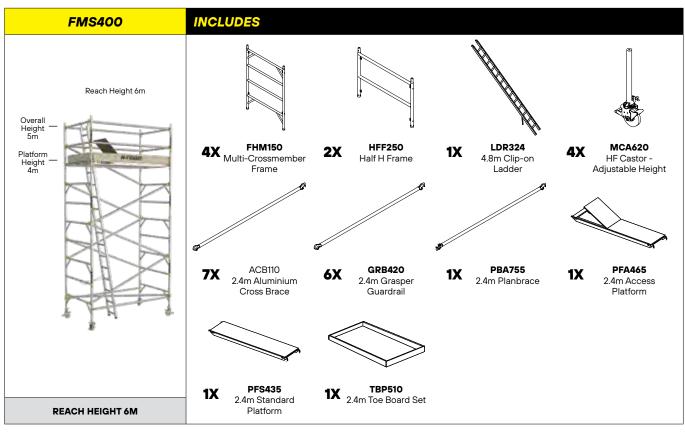


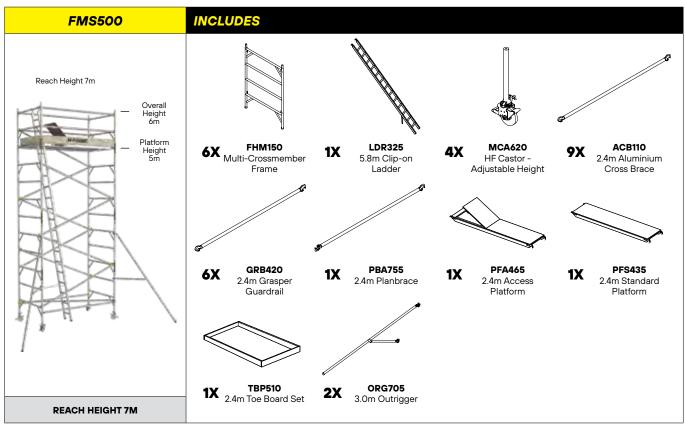


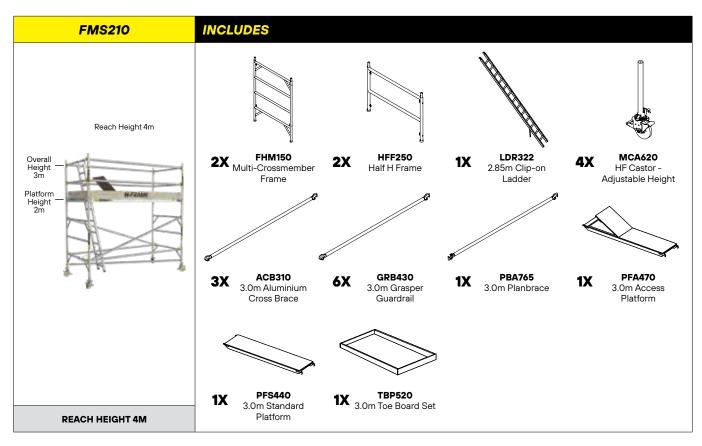

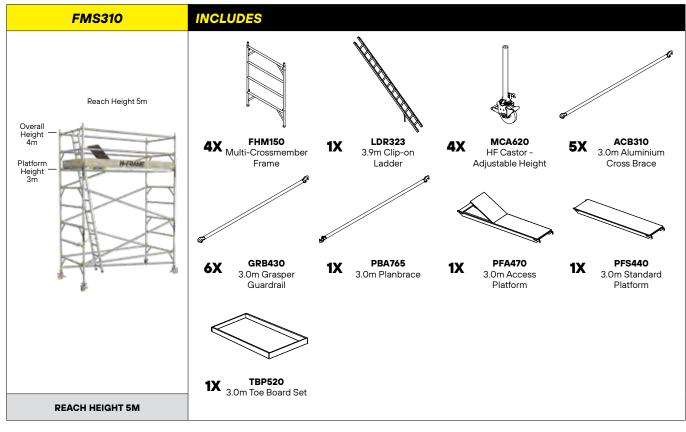

# INDUSTRIAL HEAVY DUTY H FRAME SCAFFOLD TOWERS DOUBLE WIDTH 1.37M X 3.0M LONG PLATFORM

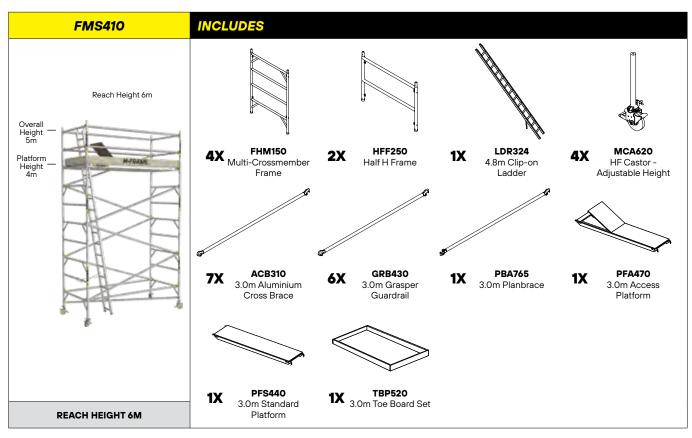

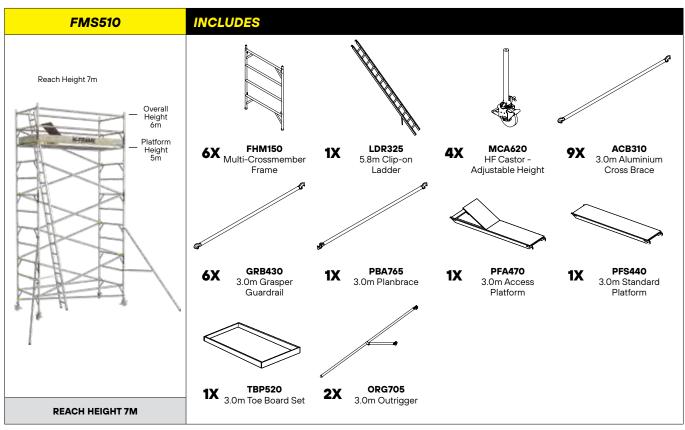








ROBUST AND EASY TO USE SNAPLOCK **BRACE GRASPER** 







**COMPLIES TO** AS/NZS 1576

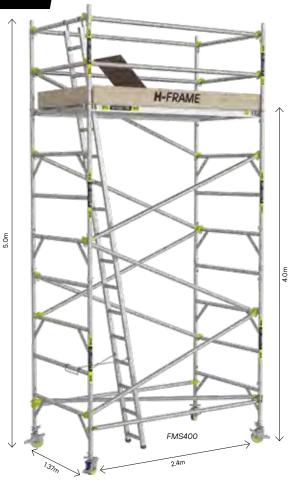







SMS300 Platform Height 3m Overall Height 4m Reach Height 5m



SMS400 Platform Height 4m Overall Height 5m Reach Height 6m



SMS500 Platform Height 5m Overall Height 6m Reach Height 7m

# SINGLE WIDTH 0.8M X 3.0M LONG PLATFORM

SMS210 Platform Height 2m Overall Height 3m Reach Height 4m



SMS310 Platform Height 3m Overall Height 4m Reach Height 5m




SMS410 Platform Height 4m Overall Height 5m Reach Height 6m





SMS510 Platform Height 5m Overall Height 6m Reach Height 7m




# INDUSTRIAL HEAVY DUTY H FRAME SCAFFOLD TOWERS SINGLE WIDTH 0.8M X 2.4M LONG PLATFORM

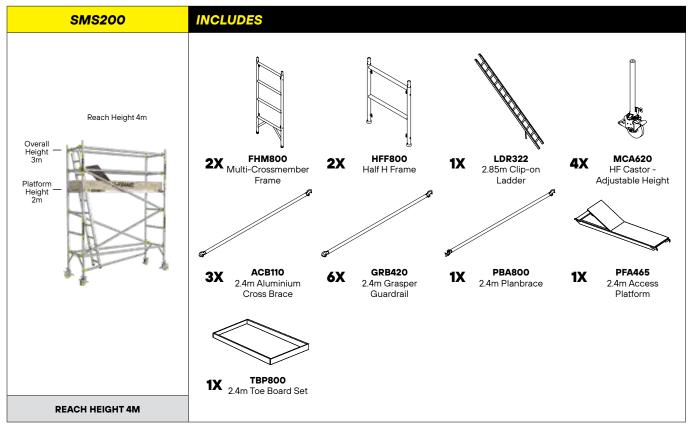

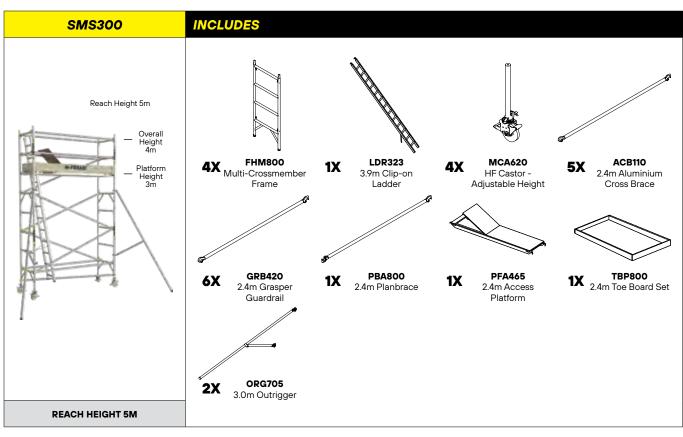


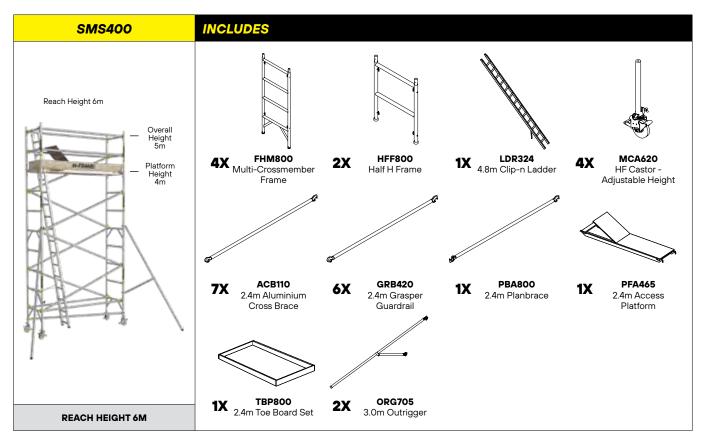


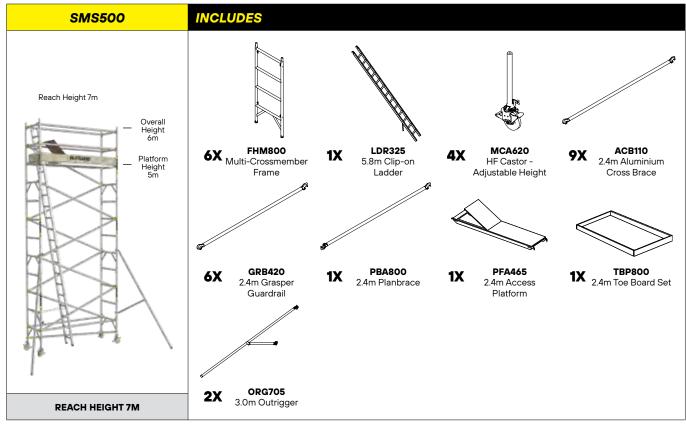





# INDUSTRIAL HEAVY DUTY H FRAME SCAFFOLD TOWERS SINGLE WIDTH 0.8M X 3.0M LONG PLATFORM

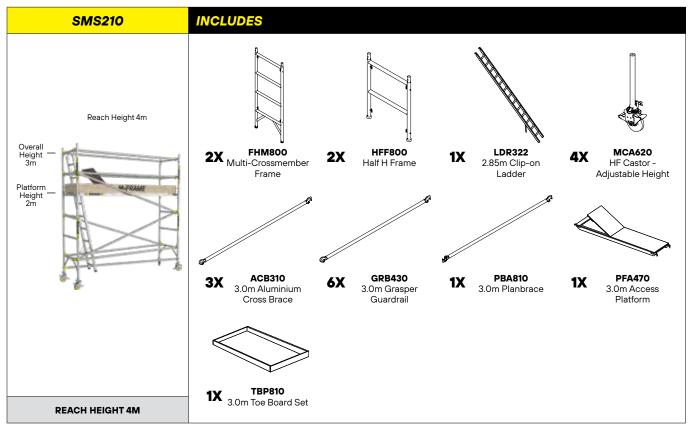

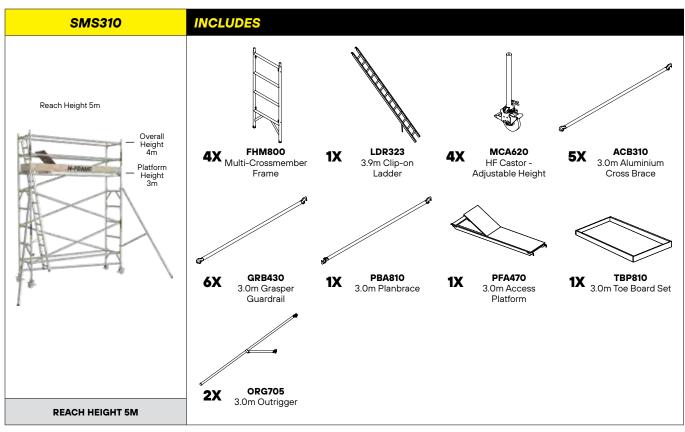

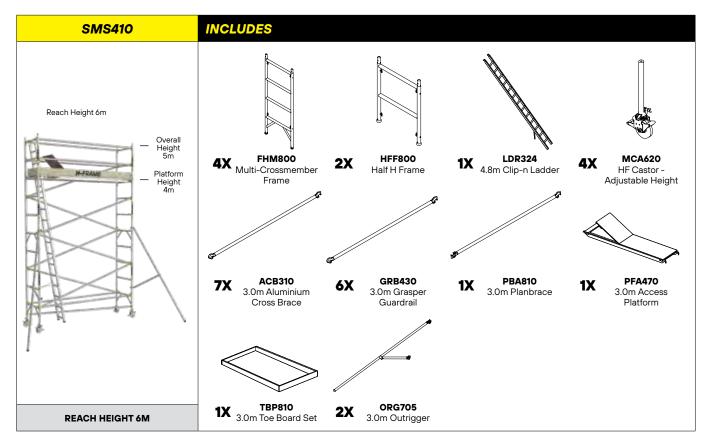

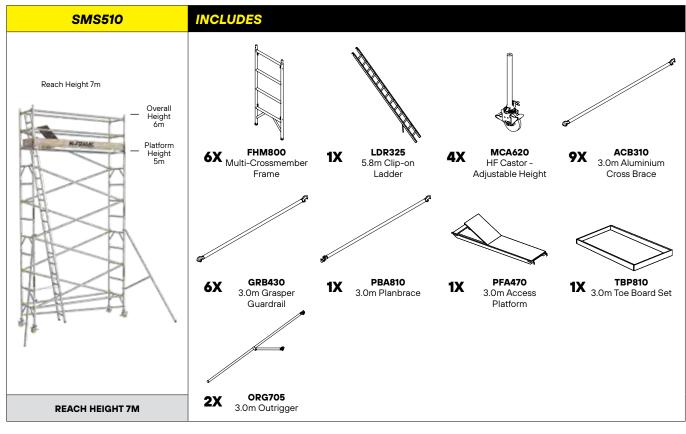

# LONG SPAN H FRAME PLATFORM JOINS TWO TOWERS TOGETHER FOR LONGLINE ACCESS

#### **FEATURES & BENEFITS**

- 3m 6m long span platform, set up in minutes
- 225kg load rating
- Lightweight and easy to handle
- Cover more area efficiently
- 2x longspan platforms fit side by side for a fully decked platform



SINGLE POST

CODE	DESCRIPTION	LENGTH
LSP300	3m Long Span	3.0m
LSP400	4m Long Span	4.0m
LSP500	5m Long Span	5.0m
LSP600	6m Long Span	6.0m
LSH300	3m Longspan Handrail	3.0m
LSH400	4m Longspan Handrail	4.0m
LSH500	5m Longspan Handrail	5.0m
LSH600	6m Longspan Handrail	6.0m
LSP100	Longspan 'F' Post	-
LSP150	Longspan Single Post	-









# H-FRAME

#### **ALUMINIUM 'Z' STAIRS**

#### **FEATURES & BENEFITS**

- Used with Easy Access heavy duty H-Frames
- Much safer to use than ladders, carry tools and equipment easily
- Lightweight easy one man handling
- Fast dramatically increases scaffolding efficiency

CODE	DESCRIPTION	LENGTH
STR310	Stair - Fits 2.4m Bay Length	2.4m
STR320	Stair - Fits 3.0m Bay Length	3.0m
STH310	Stair External Handrail	2.4m
STH320	Stair External Handrail	3.0m
STI310	Stair Internal Handrail	2.4m
STI320	Stair Internal Handrail	3.0m


<sup>\*</sup> Customised lengths and widths available



#### **FEATURES & BENEFITS**

- Used with Easy Access heavy duty H-Frames
- Compacts for easy handling and transportation
   No longer need an unwieldy 6m long ladder on the roof rack for a 5m tower
- Lightweight and robust aluminium construction
- Extends to different height settings
- Adjustable brace to compensate when the ladder is at different heights
- Attaches to Easy Access H-Frames using hooks



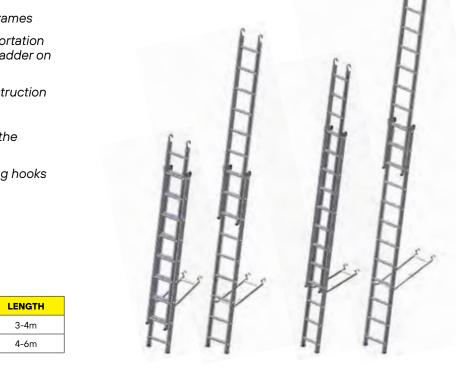

CODE	DESCRIPTION	LENGTH
LDF323-4E	Clip-on rolling tower extension ladder	3-4m
LDF324-6E	Clip-on rolling tower extension ladder	4-6m



### **HEAVY DUTY H FRAME COMPONENTS**

# 1.9m High Four Rails 500mm apart Planks and platforms can be placed on all levels

#### **END FRAME (WALK THROUGH)**

- 2m High
- Designed to give walkthrough head clearance
- Bottom tie-rail provides durability
- Weighs 8kg



#### HALF H FRAME

- 950mm High
- Can serve as either guardrails or as a half stage platform level



CODE	DESCRIPTION	ON CODE DESCRIPTION		CODE	DESCRIPTION
FHM150	Double Width End Frame	FHF150	Double width End Frame (Walk Through)	HFF250	Double Width Half End Frame
FHM800	Single Width End Frame	FHF800	Single Width End Frame (Walk Through)	HFF800	Single Width Half End Frame

#### **ADJUSTABLE HEIGHT CASTORS**

- Rated at 500kgs
- Fully braked
- Positive brakingLow maintenance
- Non-marking wheels



#### **CROSS BRACE FOR 2.4M PLATFORM**

- Galvanised steel scissor brace adds strength and durability to the system
- Colour coded for easy identification



#### **CROSS BRACE FOR 3.0M PLATFORM**

- Braces lock to frame on "drop-lock" latches
- Braces fold flat for easy storage and handling
- Colour coded for easy identification



	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \				
		CBF110	Walk-through Frame Cross Brace	CBF310	Walk-through Frame Cross Brace
CODE	DESCRIPTION	CBM110	Cross Member Cross Brace	CBM310	Multi Cross Member Cross Brace
MCA620	150mm Diam	CBH210	Half Frame Cross Brace	CBH310	Half Frame Cross Brace

DESCRIPTION

#### **GUARDRAIL POST**

- Supports guardrails on multi-bay arrangements
- Allows walk-through access at top platform level



#### STANDARD PLATFORM

- Aluminium subframe with plywood decking hook onto any crossmembers
- Works as extra ledger type bracing making scaffold more rigid
- Lightweight

CODE



#### SLEEVE GUARDRAIL

CODE

 Fits over H Frame spigots and are locked in place with D clips

DESCRIPTION

Simple and low cost



		CODE	DESCRIPTION	CODE	DESCRIPTION
CODE	DESCRIPTION	PFS435	Standard Platform 600mm x 2.4m long	GRA405	Sleeve Guardrail 2.4m long
GPA450	Guardrail Post	PFS440	Standard Platform 600mm x 3m long	GRA410	Sleeve Guardrail 3m long

#### **OUTRIGGER**

CODE

ORG705

 Stabilise scaffold when setup over the 3:1 ratio of height to base width

**DESCRIPTION** 


3m Outrigger (Each)

 Easily fitted with hand tightened couplers



#### ACCESS PLATFORM

- Hatch opening allows ladder to be put through
- Hatch locks down when not in use so will not flap open accidentally



#### **LADDERS**

CODE


- Top hooks locate over crossmembers
- Two struts hold ladder at required slope & clip to lower frame



<b>S</b>		LDR322	2.85m Ladder
CODE	DESCRIPTION	LDR323	3.9m Ladder
PFA465	Access Platform 600mm x 2.4m long	LDR324	4.8m Ladder
PFA470	Access Platform 600mm x 3m long	LDR325	5.8m Ladder



DESCRIPTION

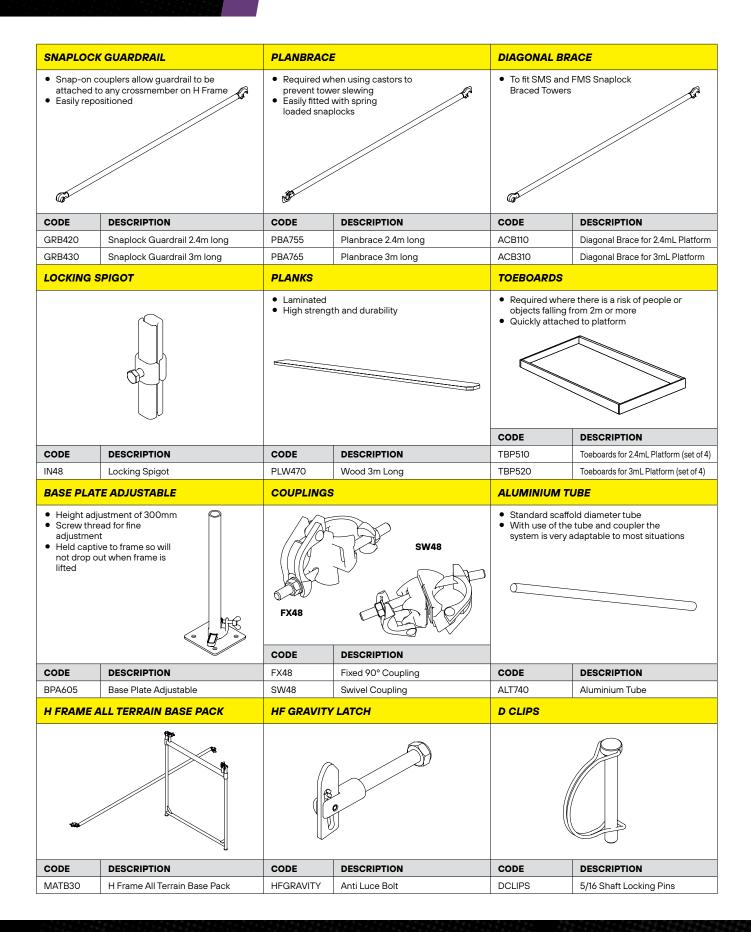





### How to choose your Industrial Scaffold

QUESTIONS YOU S	QUESTIONS YOU SHOULD ASK					
HEIGHT	What is the maximum height will you be working at? Typically the height of the work platform will be a maximum of 2m lower than the working height.					
WIDTH & LENGTH	<ol> <li>How much room do you have on site for your scaffold? This may determine a maximum length and width for your scaffold.</li> <li>How long will you be 'up there' on the scaffold? This should help determine the width and length of the scaffold you need; A larger scaffold will allow longer time periods between relocation.</li> <li>What are you taking with you? You need to make sure that you have enough space for you, any colleagues and tools on the platform.</li> </ol>					
BRACING SYSTEM	H-Frame towers feature two bracing system options. Galvanised steel cross braces are simple, low cost and very space efficient for easy transportation. Aluminium snaplock braces are lightweight and offer total flexibility for placement in different configurations.					



# LADDERS

Easy Access has the widest range of ladders available in NZ. Robust and compliant to keep you, your team and your family safe when working at height on sites and at home, no matter what the job.

For compliant use on a trade site, the minimum recommended weight rating for a ladder is 150kg, and the ladder must display an "Industrial" label.

Easy Access Warthog, TradeToughs aluminium and fibreglass ladders are rated up to a huge 200Kg SWL.

To extend the life of your ladders, replacement feet are available for all Easy Access Ladders.



NEW ZEALAND'S
WIDEST RANGE
OF LADDERS







# LADDER USE SAFETY GUIDELINES

#### **INDUSTRIAL LABEL FOR TRADE SITES**

Ladders must have an "Industrial" label to be compliant for trade sites. A minimum weight rating of 150kg is recommended for trade.

#### SAFE ANGLE OF SLOPE

The ratio of height to horizontal distance out from the vertical support surface of any single pole or extension ladder is from 1:4 to 1:6.

#### LADDER USE DURATION

Ladders are to be used only for tasks of short duration which would normally be less than 10 minutes

#### PLATFORM LADDERS ARE PREFERABLE

Platform ladders are recommended for tasks longer than 5 mins because they provide 3 points of contact, a stable working platform and a handrail. An AdjustaStep Platform ladder provides additional versatility with adjustable platform heights.

#### **LADDERS ON TRADE SITES**

Platform ladders are the only ladder type permissible on many worksites.

#### **FOLD-OUT STEP/EXTENSION LADDERS**

Look for trapezoidal steps on dual purpose ladders for a comfortable and rigid step in both step and single ladder positions.

#### LADDER COMPLIANCE

The standard of compliance for portable ladders is AS/NZS 1892.1.


NB. Worksite compliance and safety requirements may vary, check with your site supervisor for clarification.





## TRADE LITE®



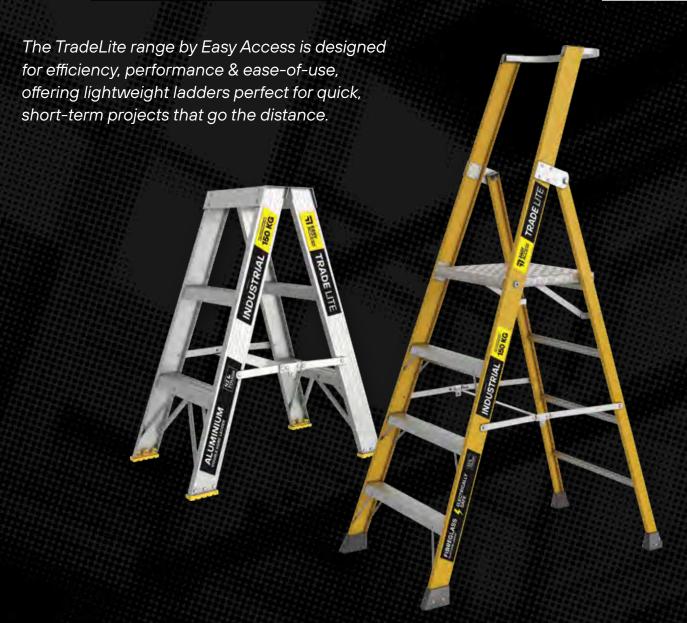













COMPLIES TO AS/NZS 1892.1






### 150KG RATED ALUMINIUM DOUBLE SIDED STEP LADDER

- Solid hinge reduces pinch points
- Lightweight robust design safe & easy to use
- Double braced base rigid, safe and long lasting
- XL Titan tough rivets for maximum durability
- Easy fold braced side stays











### 150KG RATED ALUMINIUM DUAL PURPOSE LADDER

- Lightweight robust design safe & easy to use
- Trapezoidal box step rigidity climb both sides
- XL Titan tough rivets for maximum durability
- Double-braced stiles: safe & long lasting
- Braced side stay eliminates twist







CODE	BARCODE	DESCRIPTION	LENGTH	WEIGHT	LOAD RATING
ALDP06	9421036060041	6 Step	1.8m - 3.3m	9.6kg	150kg
ALDP07	9421036060058	7 Step	2.1m - 3.9m	11.1kg	150kg



### **TRADE** LITE®

#### 150KG RATED ALUMINIUM PLATFORM LADDER

- Lightweight robust design safe & easy to use
- Additional bracing increased rigidity
- Tough aluminium platform non-slip checker plate
- Heavily-braced back leg for superior rigidity
- XL Titan tough rivets for maximum durability







CODE	BARCODE	DESCRIPTION	LENGTH	STILE LENGTH	WEIGHT	LOAD RATING
ALPL03	9421036061796	3 Step	0.9m	1.8m	9.4kg	150kg
ALPL04	9421036061802	4 Step	1.2m	2.1m	11.1kg	150kg
ALPL06	9421036061819	6 Step	1.8m	2.7m	13.9kg	150kg



### 150KG RATED ALUMINIUM TELESCOPIC ALL IN ONE LADDER

- Lightweight robust design: Safe & easy to use
- Heavy Duty Locks that are easy to operate
- Welded Rungs Increased Strength & Rigidity
- All-In-One Design: Use as a step ladder, extension ladder or on uneven ground
- Height Adjustable Stiles
- XL Titan tough rivets for maximum durability















### 150KG RATED FIBREGLASS PLATFORM LADDER

- Lightweight robust design safe & easy to use
- Additional bracing increased rigidity
- Tough aluminium platform non-slip checker plate
- Heavily-braced back leg for superior rigidity
- XL Titan tough rivets for maximum durability









CODE	BARCODE	DESCRIPTION	LENGTH	STILE LENGTH	WEIGHT	LOAD RATING
ALPLF03	9421036061659	3 Step	0.87m	1.9m	12.0kg	150kg
ALPLF04	9421036061666	4 Step	1.17m	2.2m	14.0kg	150kg
ALPLF05	9421036061673	5 Step	1.46m	2.56m	16.0kg	150kg
ALPLF06	9421036061680	6 Step	1.74m	2.8m	17.0kg	150kg







### **TRADE** TOUGH®



TradeTough by Easy Access is NZ's tough ladder range, trusted since 1999 for rugged reliability. Rated up to 200kg, these ladders are available in electrically safe fibreglass and high-tensile aluminium. With advanced features, a 10-year warranty, and AS/NZS 1892.1 compliance, they're built for performance and longevity.





ADVANCED FUNCTIONALITY INNOVATION LOADED FEATURES









COMPLIES TO AS/NZS 1892.1





### 180KG RATED ALUMINIUM DOUBLE SIDED STEP LADDER

- Non-clogging top step prevents jamming up with plaster & debris
- Largest hinges superior strength, safety & longevity
- Strong internal side stays prevents damage and pinch points
- Double braced base step increases rigidity, safety & longevity
- Stainless steel rivets with extra large heads for maximum durability







CODE	BARCODE	DESCRIPTION	HEIGHT	STANCE WIDTH	WEIGHT	LOAD RATING
OXDS02	9341231026126	2 Step	0.6m	0.39m	4.4kg	180kg
OXDS03	9341231013188	3 Step	0.9m	0.42m	5.7kg	180kg
OXDS04	9341231013195	4 Step	1.2m	0.46m	7.2kg	180kg
ОХВОН		Option	al bolt on Ha	andrail		
OX-TP40	Telescopic Aluminium Plank					
OXSEFT		Repla	cement feet	(ea)		



### 150KG RATED FIBREGLASS DOUBLE SIDED STEP LADDER

- Non-clogging top step prevents jamming up with plaster & debris
- Largest hinges superior strength, safety & longevity
- Internal side stays prevents damage and pinch points
- Double braced base step increases rigidity, safety & longevity
- High strength fibreglass stiles









CODE	BARCODE	DESCRIPTION	HEIGHT	STANCE WIDTH	WEIGHT	LOAD RATING	
OXDSF03	9341231026492	3 Step	0.9m	0.42m	6.8kg	150kg	
OXDSF04	9341231026508	4 Step	1.2m	0.46m	8.2kg	150kg	
OXDSF06	9341231026515	6 Step	1.8m	0.54m	11.7kg	150kg	
OXDSF08	9341231026522	8 Step	2.4m	0.62m	15.0kg	150kg	
ОХВОН		Option	al bolt on Ha	ındrail			
OX-TP40	Telescopic Aluminium Plank						
OXSEFT		Repla	cement feet	(ea)			



### **TRADE** TOUGH®

#### 150KG RATED ALUMINIUM DUAL PURPOSE LADDER

- Heavily-braced side stays superior rigidity & tool tray
- Superior longevity bolted not riveted moving parts
- Trapezoidal box step rigidity climb both sides











### 150KG RATED FIBREGLASS DUAL PURPOSE LADDER

- Heavily-braced side stays superior rigidity & tool tray
- Superior longevity bolted not riveted moving parts
- Trapezoidal box step rigidity climb both sides









CODE	BARCODE	DESCRIPTION	LENGTH	STANCE WIDTH	WEIGHT	LOAD RATING	
OXDPF06	9341231026553	6 Step	1.8m - 3.2m	0.55m	11.8kg	150kg	
OXDPF07	9341231026560	7 Step	2.1m - 3.9m	0.60m	13.0kg	150kg	
OXDPF08	9341231026577	8 Step	2.4m - 4.5m	0.63m	16.9kg	150kg	
OX-TP40		Telesco	pic Aluminium	n Plank			
EASOBKT		Ladde	r Stand Off Bra	acket			
OXPLFFEET	Replacement feet front (pair)						
OXPLFFEETR		Replacement feet rear/stair side (pair)					






### 150KG-200KG RATED ALUMINIUM PLATFORM LADDER

- Taller 0.9mH platform handrail operator safety & tool storage
- Tough aluminium platform non-slip checker plate with kickboard
- Trapezoidal box steps superior strength & rigidity
- Fully welded & braced back leg safe & stable
- One piece smooth operation and folds flat for storage

CODE	BARCODE	DESCRIPTION	HEIGHT*	STANCE WIDTH	STILE LENGTH	WEIGHT	LOAD RATING
OXPL02	9341231026317	2 Step	0.56m	0.54m	1.7m	9.2kg	200kg
OXPL03	9341231026324	3 Step	0.85m	0.59m	2.0m	10.3kg	200kg
OXPL04	9341231026331	4 Step	1.13m	0.63m	2.3m	11.7kg	200kg
OXPL05	9341231026348	5 Step	1.41m	0.67m	2.6m	12.9kg	200kg
OXPL06	9341231026355	6 Step	1.69m	0.71m	2.9m	15.6kg	200kg
OXPL07		7 Step	1.97m		3.2m	18.4kg	200kg
OXPL08	9341231026379	8 Step	2.26m	0.80	3.5m	19.0kg	200kg
OXPL09		9 Step	2.54m		3.8m	23.0kg	150kg
OXPL10	9421036061482	10 Step	2.83m		4.1m	24.0kg	150kg
OXPL11	9421036061499	11 Step	3.11m		4.4m	26.0kg	150kg
OXPL12	9421036061505	12 Step	3.41m		4.7m	28.0kg	150kg
OXPLFSH		Opt	ional Full Su	rround Hand	Irail		
OXPLW		I	Platform Lad	lder Wheels			
OXPLTT	Optional Clip-On Tool Bucket						
OXPLFT	Replacement feet front (pair)						
OXPLFTR		Replac	ement feet r	ear/stair side	e (pair)		





"Easy Access Platform Ladders are great as the guardrails are 900mm above the platform which is much safer than other brands which are sometimes only 400mm high."

Waisake Lutunauga Foreman, Naylor Love

### 150KG-200KG RATED FIBREGLASS PLATFORM LADDER

- Taller 0.9mH platform handrail operator safety & tool storage
- Tough aluminium platform non-slip checker plate with kickboard
- Trapezoidal box steps superior strength & rigidity
- Fully welded & braced back leg safe & stable
- One piece smooth operation and folds flat for storage

CODE	BARCODE	DESCRIPTION	HEIGHT	STANCE WIDTH	STILE LENGTH	WEIGHT	LOAD RATING	
OXPLF02	9341231029868	2 Step	0.56m	0.54m	1.7m	10.0kg	200kg	
OXPLF03	9341231026614	3 Step	0.85m	0.59m	2.0m	11.7kg	200kg	
OXPLF04	9341231026621	4 Step	1.13m	0.63m	2.3m	13.2kg	200kg	
OXPLF05		5 Step	1.5m		2.6m	15.0kg	180kg	
OXPLF06	9341231026645	6 Step	1.69m	0.71m	2.9m	17.9kg	180kg	
OXPLF07		7 Step	2.1m		3.2m	20.8kg	180kg	
OXPLF08	9421901768232	8 Step	2.26m	0.80	3.5m	21.0kg	180kg	
OXPLF10	9421036061536	10 Step	2.83m		4.1m	23.0kg	150kg	
OXPLF11	9421036061543	11 Step	3.11m		4.4m	25.0kg	150kg	
OXPLF12	9421036061550	12 Step	3.41m		4.7m	29.0kg	150kg	
OXPLFSH		Opti	onal Full Su	rround Hand	Irail			
OXPLW		F	Platform Lac	lder Wheels		,		
OXPLTT		Ор	tional Clip-C	n Tool Buck	et	,		
OXPLFFEET		Replacement feet front (pair)						
OXPLFFEETR		Replace	ement feet r	ear/stair side	e (pair)			
* Lawren Cines								

<sup>\*</sup> Larger Sizes available on request.





COMPLIES TO AS/NZS 1892.1





### **TRADE** TOUGH®

### 200KG RATED ALUMINIUM ADJUSTASTEP PLATFORM LADDER

- Taller 0.9mH platform handrail operator safety & tool storage
- Tough XL aluminium platform non-slip checker plate with kickboard
- Fast height adjustment multiple ladders in one
- Fully welded rungs & back leg safe & stable
- Once-piece, smooth operation simply folds flat and locks











"I enjoy owning and using good gear and I researched hard to determine the best quality ladder I could get for my money and hands down my new 4-7 Step TradeTough Telescopic Platform Ladder is it. It's stronger and better designed than any other ladders in it's class and that's the first sign you're getting something heavy duty and well made."

Jon Anda

CODE	BARCODE	DESCRIPTION	HEIGHT	STILE LENGTH	WEIGHT	LOAD RATING		
OXTPL03-05	9421901464783	3-5 Step	0.84m - 1.44m	1.9m - 2.5m	17.0kg	200kg		
OXTPL04-07	9421901464325	4-7 Step	1.15m - 2.02m	2.2m - 3.1m	22.0kg	200kg		
OXTPL05-09	9421901464790	5-9 Step	1.44m - 2.60m	2.5m - 3.7m	25.0kg	200kg		
OXPLFSH	Optional Full Surround Handrail							
OXPLW		Pla	atform Ladder Whe	eels				
OXPLTT		Optio	onal Clip-On Tool E	Bucket				
OXTPLFF	Replacement feet front (pair)							
OXTPLFB	Replacement feet rear (pair)							

#### 150KG RATED ALUMINIUM ADJUSTASTEP PLATFORM LADDER

- Taller 0.9mH platform handrail operator safety & tool storage
- Tough XL aluminium platform non-slip checker plate with kickboard
- Fast height adjustment multiple ladders in one
- Fully welded rungs & back leg safe & stable
- Once-piece, smooth operation simply folds flat and locks



**COMPLIES TO** AS/NZS 1892.1 WARRANTY



CODE	BARCODE	DESCRIPTION	HEIGHT	STILE LENGTH	WEIGHT	LOAD RATING
OXTPLF03-05	9421036060164	3-5 Step	0.872m - 1.435m	2.0m - 2.6m	23.7kg	150kg
OXTPLF04-07	9421036060171	4-7 Step	1.154m - 1.997m	2.3m - 3.1m	30.0kg	150kg
OXTPLF05-09	9421036060188	5-9 Step	1.435m - 2.559m	2.6m - 3.8m	34.7kg	150kg
OXPLFSH		Option	nal Full Surround H	landrail		
OXPLW		Pla	atform Ladder Whe	els		
OXPLTT		Optio	onal Clip-On Tool E	Bucket		
OXTPLFF	Replacement feet front (pair)					
OXTPLFB	Replacement feet rear (pair)					







### 150KG ALUMINIUM TELESCOPIC ALL IN ONE LADDER

- Fully bolted shark tooth hinge design safer & stronger
- Welded rungs increased strength & rigidity
- Extra heavy duty stiles & feet
- 5-in-1 double-sided ladder, stairway ladder, extension ladder, and two self-supporting trestles
- Simple heavy duty pull out & release height lock
- Can be separated into 2x individual sections for a trestle and plank configuration using OX-TP40

CODE	BARCODE	DESCRIPTION	HEIGHT	WEIGHT	LOAD RATING		
OXTL03	9341231026287	3 - 10 Step	0.9m - 3.3m	13.0kg	150kg		
OXTL04	9341231026294	4 - 14 Step	1.2m - 4.5m	16.5kg	150kg		
OXTL05	9341231026300	5 - 18 Step	1.5m - 5.7m	20.0kg	150kg		
OXTLP	9421901768362	Clip-On Platform	N/A	N/A	N/A		
EASOBKT		Ladder Stan	d Off Bracket				
OXSEFT		Replaceme	ent feet (ea)				
OXLBS		Telescopic La	dder Brackets	3			
OX-TP40	Telescopic Aluminium Plank						
OXTLFOU	Replacement feet outer L/R (pair)						
OXTLFIN		Replacement feet inner L/R (pair)					



### 150KG RATED FIBREGLASS TELESCOPIC ALL IN ONE LADDER

- Fully bolted shark tooth hinge design safer & stronger
- Welded rungs increased strength & rigidity
- Extra heavy duty stiles & feet
- 5-in-1 Double-sided ladder, stairway ladder, extension ladder, and two self-supporting trestles
- Easily operated, heavy duty height lock simple pull out and release







CODE	BARCODE	DESCRIPTION	HEIGHT	WEIGHT	LOAD RATING		
OXTLF04	9421036061369	4 - 14 Step	1.2m - 4.5m	22.0kg	150kg		
OXTLP	9421901768362	Clip-On Platform	N/A				
EASOBKT	Ladder Stand Off Bracket						
OXSEFT	Replacement feet (ea)						
OXLBS		Telescopic La	dder Brackets	3			
OX-TP40	Telescopic Aluminium Plank						
OXTLFOU	Replacement feet outer L/R (pair)						
OXTLFIN	Replacement feet inner L/R (pair)						



## **TRADE** TOUGH®

### 135KG-150KG RATED ALUMINIUM EXTENSION LADDER

- Large D-shape rungs for safety & comfort
- Side mounted rope no trip hazard
- Single rope system keep one hand free when adjusting ladder
- Wide heavy duty feet for increased bearing surface and durability







CODE	BARCODE	DESCRIPTION	HEIGHT	WEIGHT	LOAD RATING	
OXEL09	9341231026423	9 Step	2.9m - 4.7m	14.0kg	150kg	
OXEL11	9341231026430	11 Step	3.45m - 6.0m	16.0kg	150kg	
OXEL13	9341231026447	13 Step	4.1m - 7.2m	18.0kg	135kg	
EASOBKT	Ladder Stand Off Bracket					
OXELFEET	Replacement feet (pair)					

### 135KG-150KG RATED FIBREGLASS EXTENSION LADDER

- Large D-shape rungs for safety & comfort
- Side mounted rope no trip hazard
- Single rope system keep one hand free when adjusting ladder
- Wide heavy duty feet for increased bearing surface and durability









CODE	BARCODE	DESCRIPTION	HEIGHT	WEIGHT	LOAD RATING	
OXELF09	9341231026584	9 Step	2.8m - 4.7m	12.9kg	150kg	
OXELF11	9341231026591	11 Step	3.5m - 6.0m	15.4kg	150kg	
OXELF13	9341231026607	13 Step	4.1m - 7.2m	17.0kg	135kg	
EASOBKT	Ladder Stand Off Bracket					
OXELFFEET	Replacement feet (pair)					







### 135KG-150KG RATED ALUMINIUM EXTENSION LADDER WITH LEVELLING FEET

- Large D-shape rungs for safety & comfort
- Side mounted rope no trip hazard
- Single rope system keep one hand free when adjusting ladder
- Height-adjustable legs safe & fast on uneven ground up to 175mm variance









CODE	BARCODE	DESCRIPTION	HEIGHT	WEIGHT	LOAD RATING
OXEL09LFT	9421901768904	9 Step	3.19m - 4.72m	13.5kg	150kg
OXEL11LFT	9421901768911	11 Step	3.80m - 5.93m	16.0kg	150kg
OXEL13LFT	9421901768928	13 Step	4.41m - 7.15m	18.5kg	135kg
EASOBKT	Ladder Stand Off Bracket				
OXELLFTFEET		Replacement feet (pair)			



### 150KG RATED ALUMINIUM SCAFFOLD STRAIGHT LADDER

- Fits securely into scaffold
- Comfortable 'D' shaped step
- Replacement feet available
- Lightweight and easy to use
- Good value for money



COMPLIES TO
AS/NZS 1892.1



CODE	BARCODE	DESCRIPTION	LENGTH	LOAD RATING
CSL1.8	9421036061871	Aluminium Straight Ladder	1.8m	150kg
CSL2.4	9421036061888	Aluminium Straight Ladder	2.4m	150kg
CSL3.0	9421901768805	Aluminium Straight Ladder	3.0m	150kg
CSL3.6	9421901768812	Aluminium Straight Ladder	3.6m	150kg
CSL4.2	9421036061895	Aluminium Straight Ladder	4.2m	150kg
CSL4.8	9421901768829	Aluminium Straight Ladder	4.8m	150kg
CSL5.4	9421901768836	Aluminium Straight Ladder	5.4m	150kg
CSL6.0	9421036061901	Aluminium Straight Ladder	6.0m	150kg
EASOBKT	Ladder Stand Off Bracket			
CSLFEET		Replacement feet (p	air)	



### **TRADE** TOUGH®

#### 150KG RATED ALUMINIUM ROOF LADDER

- Safely climb to the apex of a pitched roof
- Safe access to any roof with a pitch of up to 45 degrees
- Easy and efficient solution for roof painting and maintenance
- Simply slide the ladder on rollers and flip over to secure the hooks over the apex
- Foamed support pads maintain even and secure contact between the ladder and roof
- Foam buffer on hook absorbs any movement and protects the roof from damage
- Replacement feet available



#### **COMPLIES TO** AS/NZS 1892.1

CODE	DESCRIPTION	LENGTH	LOAD RATING
CSRL3.0	Roof Ladder	3.0m	150kg
CSRL3.6	Roof Ladder	3.6m	150kg
CSRL4.8	Roof Ladder	4.8m	150kg
CSRL5.4	Roof Ladder	5.4m	150kg
CSRL6.0	Roof Ladder	6.0m	150kg
CSLFEET	Replacement feet (pair)		






### **CLIP-ON ROLLING MOBILE TOWER EXTENSION LADDER**

- To be used with Easy Access heavy duty mobile scaffold
- Extends & compacts for easy handling and transportation. No longer need an unwieldy 6m long ladder on the roof rack for a 5m tower
- Lightweight and robust aluminium construction
- Extends to different height settings one ladder for a range of towers at different heights or as one tower is changed in height
- Adjustable brace to compensate when the ladder is at different heights
- Attaches to Easy Access H-Frames using adjustable hooks

CODE	DESCRIPTION	LENGTH
LDF323-4E	Clip-on Rolling Extension Scaffold Ladder	3-4m
LDF324-6E	Clip-on Rolling Extension Scaffold Ladder	4-6m
<u> </u>		

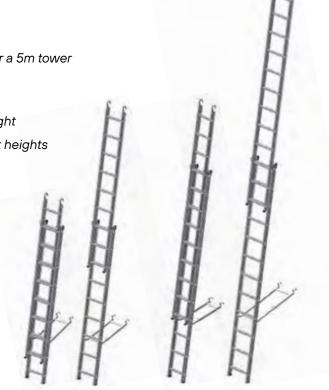









### **WARTHOG®**



Made in NZ, the Warthog range by Easy Access is the ultimate ladder range, trusted by tradies who demand nothing but the best - since 1999. Built from high-tensile aluminium with a fully-welded design, trapezoidal steps, and splayed legs, Warthog ladders are rated up to 200kg and come with a lifetime warranty. You can't go past a Warthog Ladder!



















#### 200KG RATED ALUMINIUM DOUBLE SIDED LADDER

- Smooth automatic lift-n-lock hinge mechanism
- Trapezoidal box step rigidity
- Welded rectangle stiles durable, safe & lasts the longest
- Wide base of support ultimate stability
- Compact and lightweight but seriously tough
- Non clogging hinge opens up to allow dirt and plaster to fall away










CODE	BARCODE	DESCRIPTION	HEIGHT	STANCE WIDTH	WEIGHT	LOAD RATING
WHDS02	9421901464981	2 Step	0.6m		5.9kg	200kg
WHDS03	9421901086107	3 Step	0.9m	0.49m	7.0kg	200kg
WHDS04	9421901086114	4 Step	1.2m	0.66m	8.0kg	200kg
WHDS05	9421901086121	5 Step	1.5m		9.0kg	200kg
WHDS06	9421901086138	6 Step	1.8m	0.66m	10.0kg	200kg
WHDS07	9341231007415	7 Step	2.1m	0.66m	11.0kg	200kg
WHDS08	9421901086312	8 Step	2.4m		12.0kg	200kg
WHDS09	9421901086305	9 Step	2.7m		13.0kg	200kg
FEETCAPSWART		Replac	cement feet	(pair)		





### 200KG RATED ALUMINIUM WIDE DOUBLE SIDED LADDER

- 800mm wide top step large work surface
- Non clogging top step hinges durable, safe & lasts the longest
- Smooth automatic lift-n-lock hinge mechanism
- Hollow section steps extra strength and rigidity
- Much safer and easier than a saw horse









CODE	BARCODE	DESCRIPTION	HEIGHT	WEIGHT	LOAD RATING
WHDS02-800	9421901768843	2 Step	0.6m	8.0kg	200kg
WHDS03-800	9341231086909	3 Step	0.9m	11.0kg	200kg
WHDS04-800	9341231086916	4 Step	1.2m	13.0kg	200kg
FEETCAPSWART	Replacement feet (pair)				

"Hanlon Plumbing has been using Easy Access ladders for years now. The frame on the Warthog ladders is much stronger than other ladders as they are fully welded."

> Luke Rutledge-Harding Hanlon Plumbing



### **WARTHOG®**

### 150KG-180KG RATED ALUMINIUM DUAL PURPOSE LADDER

- Trapezoidal box step rigidity climb both sides
- Welded rectangle stiles durable, safe & lasts the longest
- Exceptional torsional strength will not twist
- Wide base of support ultimate stability
- No protruding hooks or snag points to catch on roof racks and get damaged
- Same size rungs right to the top


**COMPLIES TO** AS/NZS 1892.1











180KG

LOAD RATING

Dylan O'Dwyer Decorating

### 150KG-200KG RATED ALUMINIUM PLATFORM LADDER

- Tough aluminium platform non-slip checker plate with kickboard
- Welded rectangle stiles durable, safe & lasts the longest
- Trapezoidal box step rigidity
- Fully welded & braced back leg safe & stable
- One piece, smooth operation simply folds out and locks
- Centrally mounted stay arm no more pinch points

CODE	BARCODE	DESCRIPTION	HEIGHT	STILE LENGTH	WEIGHT	LOAD RATING
WHPL02	9341231007552	2 Step	0.56m	1.7m	11.0kg	200kg
WHPL03	9421901086527	3 Step	0.85m	2.0m	12.0kg	200kg
WHPL04	9421901086534	4 Step	1.13m	2.3m	13.0kg	200kg
WHPL05	9421901086541	5 Step	1.41m	2.6m	14.0kg	200kg
WHPL06	9421901086558	6 Step	1.69m	2.9m	15.0kg	200kg
WHPL07	9421901086565	7 Step	1.97m	3.2m	16.0kg	200kg
WHPL08	9421901086572	8 Step	2.26m	3.5m	17.0kg	200kg
WHPL09	9341231007569	9 Step	2.54m	3.8m	18.0kg	150kg
WHPL10	9341231007576	10 Step	2.82m	4.1m	19.0kg	150kg
WHPLWCSM	Sp	oring Wheel to suit	WHPL c/w bo	olts (per each v	wheel)	
WHPLFSH	Full Surround Handrail					
FEETCAPSWART		Repla	cement feet	(pair)		



**COMPLIES TO** AS/NZS 1892.1









<sup>\*</sup> Extra height models available on request as a special order

### 150KG ALUMINIUM SCAFFOLD STRAIGHT LADDER

- 'D' Stile fits securely into scaffold coupler
- Welded rungs for extra strength and rigidity
- Box section stiles for twist resistant safety
- Replacement feet available



COMPLIES TO AS/NZS 1892.1







CODE	BARCODE	DESCRIPTION	LENGTH	LOAD RATING
DSL3.0	9341231007750	Aluminium Straight Ladder	3.0m	150kg
DSL3.6	9341231007767	Aluminium Straight Ladder	3.6m	150kg
DSL4.8	9341231007774	Aluminium Straight Ladder	4.8m	150kg
DSL5.4	9341231007781	Aluminium Straight Ladder	5.4m	150kg
PL48	9341231007798	Putlog Coupler		
EASOBKT		Ladder Stand Off Brack	ket	
DSLFEET	Replacement feet (pair)			

<sup>\*</sup> Only suitable with Handrail and Safety Gate Set





### **WARTHOG®**

### **FOLDING ORDER PICKER** - ALUMINIUM WHEELED CHASSIS

- Strong and lightweight; high tensile aluminium construction
- Fast; no assembly required and the ladder folds flat to assist with storage and handling
- Sturdy; fully welded joints, no rivets to work loose over time
- Smart; the wheel carriage is operated from the front and folds quickly away once the ladder is in position
- Durable; corrosion resistant aluminium
- Reliable; 10 year guarantee













CODE	DESCRIPTION	PLATFORM HEIGHT	BASE WIDTH	BASE LENGTH	LOAD RATING
WHOP05WC	5 Step with Wheeled Carriage	1410mm	926mm	1350mm	150kg
WHOP06WC	6 Step with Wheeled Carriage	1692mm	926mm	1500mm	150kg
WHOP07WC	7 Step with Wheeled Carriage	1974mm	926mm	1650mm	150kg
WHOP08WC	8 Step with Wheeled Carriage	2256mm	926mm	1800mm	150kg
WHOP09WC	9 Step with Wheeled Carriage	2538mm	1092mm	1950mm	150kg
WHOP10WC	10 Step with Wheeled Carriage	2820mm	1092mm	2100mm	150kg
WHOP11WC	11 Step with Wheeled Carriage	3100mm	1092mm	2250mm	150kg
WHOP12WC	12 Step with Wheeled Carriage	3383mm	1092mm	2400mm	150kg

"I was asked to purchase a platform following a safety improvement request, I phoned around our other branches and the answer was unanimous, 'Easy Access Range'. The Order Picker we decided on ticked all the boxes and more! Thankyou to the team at Easy Access, your communications were on the ball."

Mana Hiini Metalcraft Roofing Products

### QUICK AND EASY SET UP - NO HASSLE



STEP 1 OPEN LATCH



STEP 2



STEP 3 PULL UNTIL OPEN & FULLY SECURE



STEP 4 RAISE TO DISENGAGE WHEELS AND PUSH DOWN LEVER



STEP 5 CLIMB & OPEN SECURITY RAIL




STEP 6 **EASY WITHOUT** COMPROMISING ON SAFETY





### FOLDING ORDER PICKER - ALUMINIUM SPRING WHEELED

This ladder incorporates the same design and specifications as the wheeled chassis version with the following alterations:

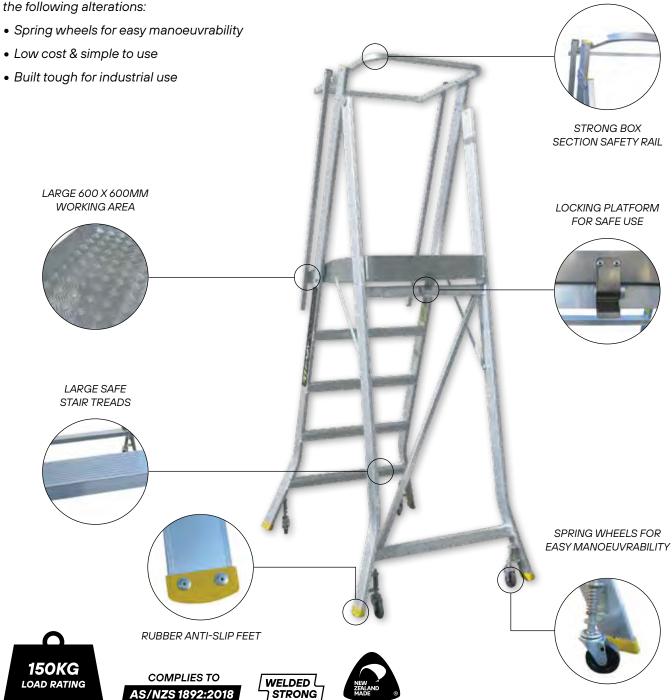

CODE	DESCRIPTION	PLATFORM HEIGHT	BASE WIDTH	BASE LENGTH	LOAD RATING
WHOP03SW	3 Step with Spring Wheels	846mm	926mm	1050mm	150kg
WHOP04SW	4 Step with Spring Wheels	1128mm	926mm	1200mm	150kg
WHOP05SW	5 Step with Spring Wheels	1410mm	926mm	1350mm	150kg
WHOP06SW	6 Step with Spring Wheels	1692mm	926mm	1500mm	150kg
WHOP07SW	7 Step with Spring Wheels	1974mm	926mm	1650mm	150kg









# TRADE TOUGH® ACCESSORIES

### **BOLT-ON HANDRAIL FOR DOUBLE** SIDED LADDERS

- For added Safety & Stability
- Provides 3 points of contact
- Aluminium Construction
- Simple bolt on Assembly

CODE	DESCRIPTION
OXBOH	Bolt-On Handrail for Double Sided Ladders



### **OPTIONAL FULL SURROUND HANDRAIL** FOR PLATFORM LADDERS

- Full surround handrail for added safety
- Compatible with all Easy Access TradeTough Platform Ladders including Height-Adjustable Platform Ladders
- Lifting arm locks into place
- Folds flat against ladder when not in use no tools required to adjust

CODE	DESCRIPTION
OXPLFSH	Optional Full Surround Handrail for Platform Ladders





#### PLATFORM LADDER WHEELS

- Set of 4 spring-loaded ladder wheels
- Fits TradeTough Aluminium & Fibreglass Platform Ladders
- Allows platform ladders to roll easily
- Locks in place when weight is applied
- Automatically releases when you step off
- Increase your efficiency!

CODE	DESCRIPTION
OXPLW	Platform Ladder Wheels









### TRADE TOUGH® ACCESSORIES

### **OPTIONAL CLIP-ON TOOL BUCKET**

- Clip-on tool bucket for handy access to tools while working
- Compatible with all TradeTough Platform Ladders and ADJUSTASTEP Adjustable Platform Ladders





CODE	DESCRIPTION	
OXPLTT	Optional Clip-On Tool Bucket	

#### TELESCOPIC LADDER BRACKETS

- Set of two Telescopic Ladder Brackets to transform your TradeTough All-in-One Telescopic Ladder into two separate ladders
- Compatible with TradeTough All-in-One Telescopic 3 Step, 4 Step & 5 Step ladders
- 2 per set

CODE	DESCRIPTION
OXLBS	Telescopic Ladder Brackets



### **OPTIONAL CLIP-ON PLATFORM**

- Optional clip-on platform to be used as a stand-off platform or a handy tool tray
- Clip between front & back stiles for it to be used as a tool tray, or clip onto the rung for a stand-off platform!
- Compatible with all TradeTough Telescopic All-In-One Ladders!

CODE	DESCRIPTION
OXTLP	Optional Clip-On Platform





### TRADE TOUGH® ACCESSORIES

#### TELESCOPIC LADDER WHEELS

Compatible with:

- TradeTough Height Adjustable Platform Ladders
- TradeTough All-In-One Telescopic Ladders
- Set of 2 Wheels





CODE	DESCRIPTION
OXTPLWSET	Telescopic Ladder Wheels



### TEASY WARTHOG ACCESSORIES

### **OPTIONAL FULL SURROUND HANDRAIL** FOR PLATFORM LADDERS

- Creates a 360° handrail
- Full surround handrail for added safety
- Compatible with all Easy Access Warthog Platform Ladders
- Lifting arm provides easy access
- Bolt on assembly

CODE	DESCRIPTION					
WHPLFSH	Optional Full Surround Handrail for Platform Ladders					



### OPTIONAL SPRING LOADED WHEELS FOR **PLATFORM LADDERS**

- Set of 4 spring-loaded ladder wheels
- Fits Warthog Platform Ladders
- Allows platform ladders to roll easily
- · Locks in place when weight is applied
- Automatically releases when you step off
- Increase your efficiency!

CODE	DESCRIPTION				
WHPLWCSM	Optional Spring Loaded Wheels for 2 & 3 Step Platform Ladders				
WHPLWCLG	Optional Spring Loaded Wheels for 4 & 10 Step Platform Ladders				



### **GENERAL ACCESSORIES**

### LADDER STAND OFF BRACKET

- Aluminium Ladder Stand Off Bracket to be used with Telescopic Ladders or Extension Ladders when in extended position
- Universal lock means the bracket can be used on a variety of ladder brands
- Keeps the ladder further from the surface
- Useful for spanning over obstacles like downpipes, windows and other uneven obstacles
- Grippy, heavy duty rubber feet

CODE	DESCRIPTION
EASOBKT	Ladder Stand Off Bracket







# LADDERS

## REPLACEMENT LADDER FEET





### **LADDERS**

### REPLACEMENT LADDER FEET







Easy Access supplies a full range of work platforms, trestles and planks to support you working safely.

Our range includes aluminium and wooden planks and A frame trestles through to folding workhorses and aluminium platforms for quick and easy low level access.



SAFE, EFFICIENT, EASY!



### **WORK PLATFORMS, TRESTLES & PLANKS**

### 160KG RATED EASYSTEP SAFETY STEPPING STOOL

- 505mm x 505mm x 365mm (h)
- Improved grip tape for even greater stability
- Indented steps on all four sides
- Reinforced underside for extra strength
- Weighs 3.5kg



**COMPLIES TO** AS/NZS 1892.1






CODE	DESCRIPTION	COLOUR	LOAD RATING	
EASTEP	505mm(L) x 505mm(W) x 365mm(H)	Orange	160kg	

### 160KG RATED EASYSTEP ROLLING INSERT FOR SAFETY STOOL


- Designed for use with the Easy Access EasyStep, this spring-wheeled insert allows the EasyStep to be easily rolled across smooth surfaces
- The spring-wheeled design lets you roll the step into position, and it automatically locks when pressure is applied to the top step, ensuring immediate, secure use













### 160KG RATED EASYSTEP DOUBLE SAFETY STOOL

- The EasyStep Double is a 2-step safety stool that can be used as an alternative to a ladder
- It features a heavy-duty design with a top step height of 510mm and measures 570mm wide by 655mm deep.
- Built-in handholds, grip tape, and indented steps provide excellent grip and added safety.
- Compact and sturdy, it's suited for offices, warehouses, retail, construction sites, and many other applications





### COMPLIES TO AS/NZS 1892.1

CODE	DESCRIPTION	COLOUR	LOAD RATING	
EA2STEP	510mm x 570mm x 655mm(H)	Orange	160kg	





### 225KG RATED QUICK-LATCH SAWHORSE

#### **FEATURES & BENEFITS**

• Folds to an easily stored saw horse - takes 85% less room to store than a fixed leg version

• Simple locking legs for total safety

• Zinc coated for rust protection

• Half the weight of a wooden sawhorse

• Load capacity 225kg



WQLL/2







TRADE TOU	WQLL		
RIPTION	HEIGHT	LENGTH	WEIGHT
ch Sawhorse	700mm	900mm	6.5kg
awhorse - 2 PACK	700mm	900mm	13.0kg






TRADETOLIN DISCHLARGE


### 150KG RATED FOLDING ALUMINIUM WORK PLATFORM

#### **FEATURES & BENEFITS**

- Positive locking hinges with safety catch lock
- Lightweight and quick to assemble and move around

 Perfect for low level decorating and standard height ceiling work



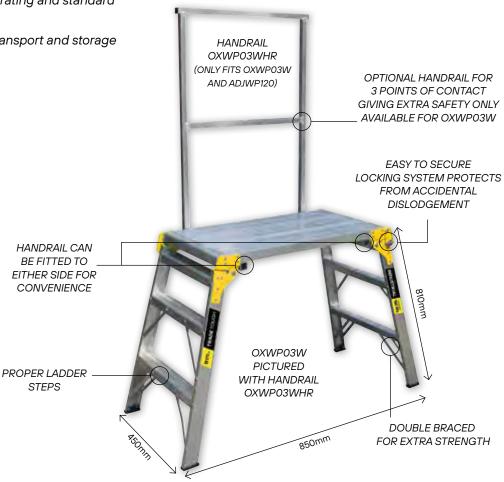



CODE	BARCODE	DESCRIPTION	HEIGHT	LENGTH	WIDTH	WEIGHT	LOAD RATING
OXWP02	9421901768355	Folding Work Platform	500mm	850mm	300mm	6.0kg	150kg
OXWP03	9341231027147	Folding Work Platform	900mm	850mm	300mm	7.0kg	150kg
OXWP03W	9421901768799	Wide Folding Work Platform	900mm	850mm	450mm	8.3kg	150kg
OXWP03WHR	9421901768867	Handrail - only fits OXWP03W and ADJWP120	900mm	N/A	N/A	N/A	N/A
OXWPFEET		Replacement feet (ea)					













### 150KG RATED ALUMINIUM HEIGHT ADJUSTABLE WORK PLATFORM

### **FEATURES & BENEFITS**

- 6 height settings 600mm 850mm
- 450mm wide platforms for safety and efficiency
- Each leg independently adjusts for uneven ground
- Lightweight and folds flat for easy store







CODE	DESCRIPTION	HEIGHT	LENGTH	WIDTH	WEIGHT	LOAD RATING
ADJWP120	Folding 3 step Work platform adjustable legs	0.6m - 0.85m	1250mm	450mm	11.8kg	150Kkg
ADJWP085	Folding 3 step Work platform adjustable legs	0.6m - 0.85m	850mm	450mm	10.8kg	150kg
OXWP03WHR	Handrail - only fits OXWP03W and ADJWP120	900mm	N/A	N/A	N/A	N/A
ADJWPFEET	Replacement feet (ea)					

### **WORK PLATFORMS, TRESTLES & PLANKS**

### TELESCOPIC ALUMINIUM PLANK


### **FEATURES & BENEFITS** Heavy duty expandable platform

- Simply extend and lock at desired length
- Compact for easy handling and transportation
- Lightweight and robust aluminium construction
- Slip resistant surface for safety
- Rubber end caps prevent damage
- Smooth sliding action for effortless adjustment
- Help turn telescopic ladders into a versatile work platform



#### **COMPLIES TO** AS/NZS 1892:2018

CODE	BARCODE	DESCRIPTION	LENGTH	WIDTH	LOAD RATING
OX-TP40	9341231008252	Telescopic Plank	2.23m - 4.0m	300mm	150kg

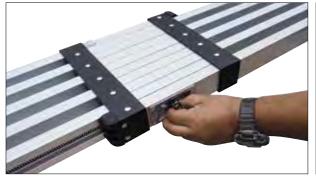



LOCKING MECHANISM TO FIX PLANK AT DESIRED LENGTH

#### **WOODEN PLANK**

#### **FEATURES & BENEFITS**

- Use between two ladders
- 3m Long
- Non-corrosive
- Structural laminated veneer lumber
- Strong durable and reliable

CODE	DESCRIPTION	LENGTH
PLW470	Wooden Plank	3.0m





### 150KG RATED ALUMINIUM "A" FRAME TRESTLES

#### **FEATURES & BENEFITS**

- Much lighter and more user friendly than steel
- Full width to take two planks meeting safety standards
- Adjustable foot option for uneven ground
- Fully welded rung and box section stiles give great strength and durability



### COMPLIES TO AS/NZS 1892:2018

CODE	BARCODE	DESCRIPTION	WIDTH	LOAD RATING	WEIGHT
AFT120	9341231008030	1.2m Aluminium Trestle	485mm	150kg	7.5kg
AFT180	9421901086879	1.8m Aluminium Trestle	485mm	150kg	10.5kg
AFT240	9421901086886	2.4m Aluminium Trestle	485mm	150kg	14.5kg
AFT300	9421901086893	3.0m Aluminium Trestle	485mm	150kg	18.0kg
AFT360	9341231008047	3.6m Aluminium Trestle	485mm	150kg	22.0kg
AFT420	9341231008054	4.2m Aluminium Trestle	485mm	150kg	28.5kg
AFT480	9341231008061	4.8m Aluminium Trestle	485mm	150kg	32.0kg
ADJ04	9341231008078	Adjustable feet (x4) - Optional			










### SUPER TRESTLES - THE FASTEST WORK PLATFORM ON THE PLANET!

#### **FEATURES & BENEFITS**

- One piece, height adjustable sets up in seconds
- Large work area for industrial trade use
- Non-slip perforated platform deck guaranteed and proven safety
- Folds down flat for easy transport & storage
- Simply select the height by sliding in the pin, walk up the integral ladder and start work
- Optional full surround handrail also folds flat for storage and transport
- Replacement feet available

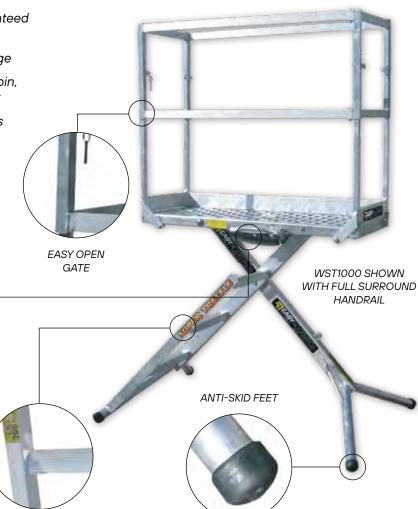



SPRING ASSISTED LIFT



OPTIONAL SPRING LOADED WHEEL



CO AS/

MPLIES TO	NON-SLIP ACCESS
WIPLIES TO	I ADDER
/N/70 1574	LADDER

CODE	DESCRIPTION	DECK SIZE	HEIGHT	LOAD RATING	WEIGHT
WST1000	Wide Stabull Platform Max Height 1000mm	450mm x 1200mm	400mm - 1000mm*	225kg	23.0kg
WST1300	Wide Stabull Platform Max Height 1300mm	450mm x 1600mm	600mm - 1300mm*	225kg	25.0kg
WST1700	Wide Stabull Platform Max Height 1700mm	450mm x 1600mm	700mm - 1700mm*	225kg	28.0kg
45WTP	Wide 450mm X 2.4m Long Treadplank	450mm x 2400mm		225kg	
45LTP	Wide 450mm X 3.0m Long Treadplank	450mm x 3000mm		225kg	
PHR24	Handrail for 2.4 Treadplank				
PHR30	Handrail for 3.0 Treadplank				
WSTFSH10	WST Full Surround Handrail for WST1000				
WSTFSH17	WST Full Surround Handrail WST1300/1700				
STW	Stabull Spring Loaded Wheel				
STFEETCAP	Replacement feet (ea)				

<sup>\*</sup> Approximate mm







# EDGE PROTECTION SAFETY GUIDELINES

#### **EDGE PROTECTION REQUIRED**

Edge protection must be provided on all work surfaces where a person can fall 2mtrs or more.

#### **BOLT-FREE EDGE PROTECTION**

Easy Access EasyRail Edge protection uses a bolt-free cantilever base or under-soffit bracket system - no unsightly scars!

### **MODULAR AND EASILY MOVED**

Easy Access Edge Protection is modular - surround a full house, or move a small section around as required.

#### **GUARDRAILS**

Three guardrails are required for roofs with an angle of slope of 10deg – 35deg – only a guardrail and midrail are required for gable ends.

#### **GUARDRAIL POSITIONING**

The lowest guardrail should be positioned no more than 150mm above gutter height, and rails above no more than 500mm apart.

#### **EDGE PROTECTION COMPLIANCE**

Temporary roof edge protection systems on roofs with an angle of slope up to 35deg must comply with the requirements of AS/NZS 4994.1:2009.

### **PLATFORM EDGE PROTECTION**

Add EasyDeck components to provide platform access to building fascia when using EasyRail edge protection.


### **DISTANCE TO WORK**

The platform should be no more than 300mm from the working face.

### **MADE IN NZ**

EasyRail Roof Edge Protection, and EasyDeck Platform access systems are made in NZ to ASNZS 4994: 2009 standards.

NB. Worksite requirements may vary, and may be more stringent than the legal requirement.

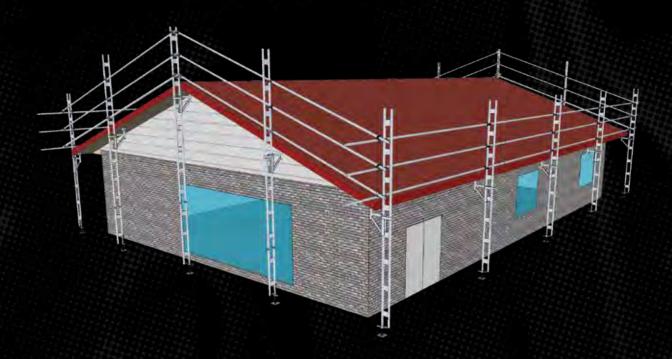



# THE FASTEST ROOF EDGE PROTECTION SYSTEM TO INSTALL

### **FEATURES & BENEFITS**

- EasyRail roof edge protection is available in 4 standard post heights, 1m, 2m, 3m and 4m these can also be joined using the EasyRail joining spigot
- For installation, the cantilever bracket simply slides up the posts and is tightened under the eaves
- Using couplers and aluminium tube, base, mid and top rails can be installed in minutes
- EasyRail is the ultimate safe solution for any low level roof edge protection application
- Platforms maybe installed at any height on the EasyRail posts for access to building fascia




COMPLIES TO
AS/NZS 4994:2009









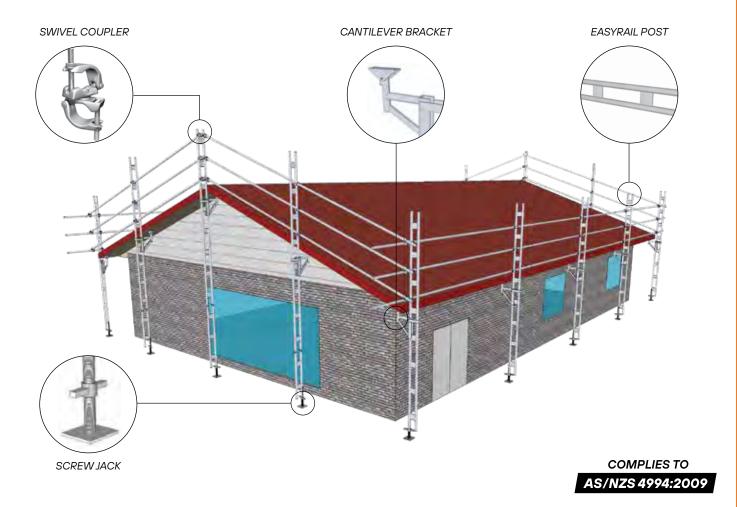

### STEP UP GUIDE AND QUICK INSTALLATION TIPS



**STEP 1**Measure the height to the underside of eaves and place the cantilever bracket at correct height on the easyrail post.



Place base of post over a screw jack and lean against the roof edge of the building. Repeat and space no more than 4m to desired length.



Adjust the screw jack until the cantilever bracket is held firm under the eaves. Ensure the post is vertical and the cantilever bracket is under a solid member if required, fix bracket to underside of eaves.



Using a ladder, place rail coupler at a point 200mm above the roof line. Fix 2 more couplers at 500mm and 1000mm above this same point. Ensure the coupler "tongues" are positioned facing upwards to hold handrail.



**STEP 5**Using a ladder, place the aluminium tube rails in position, then tighten each coupler.




**QUICK INSTALL TIP:**If 2 people are available then the horizontal rails can be fitted to the posts while on the ground. Lift the complete assembly into place and tighten screw jacks under the eaves.



# **EASYRAIL ALUMINIUM EDGE PROTECTION PACKS**

### HALF GABLE END & 6.0M OF STRAIGHT EDGE PROTECTION

PACK A	DESCRIPTION	BATCH QTY
AER300.400	4.0m EasyRail Truss, Roof Post	4
AER300.200	2.0m EasyRail Truss, Roof Post	2
AER350.600	EasyRail Tube 6.0m length	5
AER610.300	0.30m EasyRail Cantilever Bracket	4
ER500.060	0.60m Base Jack - Adjustable	4
IN48	EasyRail Internal Joining Spigot	4
FX48	EasyRail Fixed Double Coupler	9
SW48	EasyRail Swivel Coupler	4

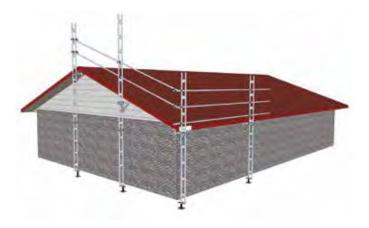

### **FULL GABLE END & 12.0M OF STRAIGHT EDGE PROTECTION**

PACK B	DESCRIPTION	BATCH QTY
AER300.400	4.0m EasyRail Truss, Roof Post	8
AER300.200	2.0m EasyRail Truss, Roof Post	1
AER300.100	1.0m EasyRail Truss, Roof Post	2
AER350.600	EasyRail Tube 6.0m length	10
AER610.300	0.30m EasyRail Cantilever Bracket	8
ER500.060	0.60m Base Jack - Adjustable	8
IN48	EasyRail Internal Joining Spigot	6
FX48	EasyRail Fixed Double Coupler	15
SW48	EasyRail Swivel Coupler	12





# STRAIGHT EDGE PROTECTION 6.0M

PACK C	DESCRIPTION	BATCH QTY
AER300.400	4.0m EasyRail Truss, Roof Post	2
AER350.600	EasyRail Tube 6.0m length	3
AER610.300	0.30m EasyRail Cantilever Bracket	2
ER500.060	0.60m Base Jack - Adjustable	2
FX48	EasyRail Fixed Double Coupler	6



### **GABLE END ONLY 12.0M**

PACK D	DESCRIPTION	BATCH QTY
AER300.400	4.0m EasyRail Truss, Roof Post	5
AER300.200	2.0m EasyRail Truss, Roof Post	1
AER300.100	1.0m EasyRail Truss, Roof Post	2
AER350.600	EasyRail Tube 6.0m length	4
AER610.300	0.30m EasyRail Cantilever Bracket	5
ER500.060	0.60m Base Jack - Adjustable	5
IN48	EasyRail Internal Joining Spigot	6
SW48	EasyRail Swivel Coupler	12



### **FULL HOUSE LOT 52 METRES**

PACK E	DESCRIPTION	BATCH QTY
AER300.400	4.0m EasyRail Truss, Roof Post	16
AER300.200	2.0m EasyRail Truss, Roof Post	6
AER350.600	EasyRail Tube 6.0m length	26
AER610.300	0.30m EasyRail Cantilever Bracket	16
ER500.060	0.60m Base Jack - Adjustable	16
IN48	EasyRail Internal Joining Spigot	24
FX48	EasyRail Fixed Double Coupler	38
SW48	EasyRail Swivel Coupler	16





# THE EASYDECK ADVANTAGE

### **FEATURES & BENEFITS**

- A high strength, lightweight welded aluminium structure
- Protect from roof falls while working on the soffit and wall of the building
- This is a multi use system combination
- System is free standing, does not require any fixing to the building
- Fast, two person set up, it reduces downtime on the job saving time and money
- Unique combination of the easy rail edge protection system, Easy Access prefabricated platforms and cantilever support brackets
- The system incorporates many standard Easy Access scaffold components including guardrails and platforms

- You can save money by adding to the scaffold components you already have
- Certified aluminium or wooden planks can be used to create a work platform
- Height adjustable screw jacks allow for uneven ground
- The base frame can be located on the top of standard Easy Access H-Frames to enable quick and safe access and edge protection on two story homes
- Platform height is totally adjustable along the length of the easy rail post




COMPLIES TO AS/NZS 1576



# **EASY INSTALL**













# STANDARD DIMENSIONAL REQUIREMENTS

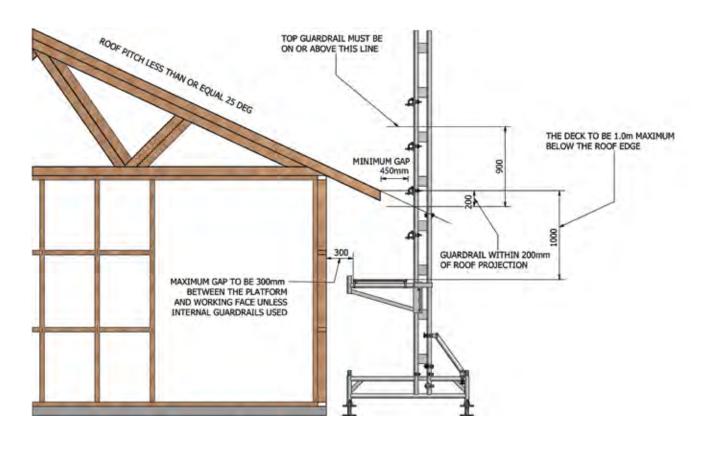



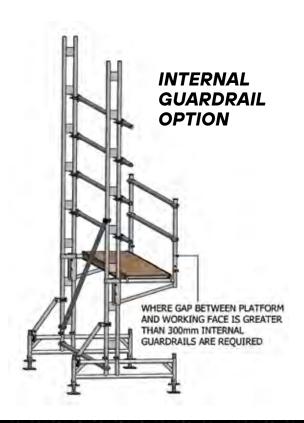


# **EASYDECK PACKS**

### PACK F - 3M STARTER BAY

PACK F	DESCRIPTION	BATCH QTY
IN48	Easyrail Internal Joining Spigot	4
BPA605	Adjust. Base Plate	4
AER FRAME	Alloy Easyrail Frame	2
AER610.650	0.65m Alloy Easyrail Cantilever Bracket	2
PFS440	3.0m Standard Platform	1
AER300.400	4.0m Alloy Easyrail Truss, Roof Post	2
AER100.300	3.0m Alloy Easyrail Diagonal Brace	1
GRB430	3.0m Grasper Guardrail	1
FX48	Easyrail Fixed Double Coupler	8


- Toe boards are required if the platform is over 2m high
- Timber scaffold planks can be used to create a toe board
- Additional Ladder Access Gates are available to close in corners

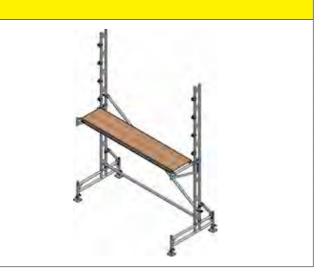

# PACK G - 6M HANDRAIL PACK

PACK G	DESCRIPTION	BATCH QTY
AER350.600	Alloy Easyrail Tube	4
IN48	Easyrail Internal Joining Spigot	4
FX48	Easyrail Fixed Double Coupler	4

- Attach to easy rail roof post with fixed double castors
- Join together with expanding spigots

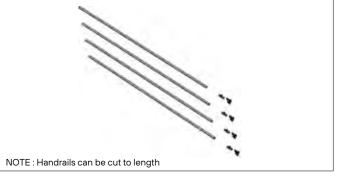

### PACK H - 3M ADD ON BAY

PACK H	DESCRIPTION	BATCH QTY
GRB430	3.0m Grasper Guardrail	1
PFS440	3.0m Standard Platform	1
AER300.400	4.0m Alloy Easyrail Truss, Roof Post	1
IN48	Easyrail Internal Joining Spigot	2
BPA605	Adjust. Base Plate	2
AER FRAME	Alloy Easyrail Frame	1
FX48	Easyrail Fixed Double Coupler	4
AER610.650	0.65m Alloy Easyrail Cantilever Bracket	1

- Outriggers must be used every 3 bays minimum
- Diagonals must be used every 4 bays minimum
- 4.0m x 6.0m guardrails need to be added every second bay



REFER TO PAGES 121 - 122 EASY SYSTEM COMPONENTS LIST



# PACK I - 2.4M ADD ON BAY

PACKI	DESCRIPTION	BATCH QTY
GRB420	2.4m Grasper Guardrail	1
PFS435	2.4m Standard Platform	1
AER300.400	4.0m Alloy Easyrail Truss, Roof Post	1
IN48	Easyrail Internal Joining Spigot	2
BPA605	Adjust. Base Plate	2
AER FRAME	Alloy Easyrail Frame	1
FX48	Easyrail Fixed Double Coupler	4
AER610.650	0.65m Alloy Easyrail Cantilever Bracket	1

• Alternative to Pack H



### PACK J - 21M STRAIGHT PLATFORM EDGE PROTECTION

REFER TO PAGES 121 - 122 EASY SYSTEM COMPONENTS LIST

# **EASYDECK PACKS**

AER350.600


ORG705

#### PACK K - 70M HOUSELOT PACK K **DESCRIPTION BATCH QTY** GRB420 2.4m Grasper Guardrail **GRB430** 3.0m Grasper Guardrail 23 GRL300 3.0m Reinforced Grasper Ledger 4 PFS410 1.0m Standard Platform PFS415 1.5m Standard Platform PFS435 2.4m Standard Platform PFS440 3.0m Standard Platform 22 AER300.200 2.0m Alloy Easyrail Truss, Roof Post AER300.400 4.0m Alloy Easyrail Truss, Roof Post 29 IN48 Easyrail Internal Joining Spigot 90 BPA605 Adjust. Base Plate 62 **AER FRAME** Alloy Easyrail Frame 31 144 FX48 Easyrail Fixed Double Coupler AER610.650 0.65m Alloy Easyrail Cantilever Bracket 31 AER100.300 3.0m Alloy Easyrail Diagonal Brace LAG0.5 Ladder Access Gate 2



• A comprehensive pack of equipment that includes multiple internal and external corner kits as well as two gated access points.

Alloy Easyrail Tube

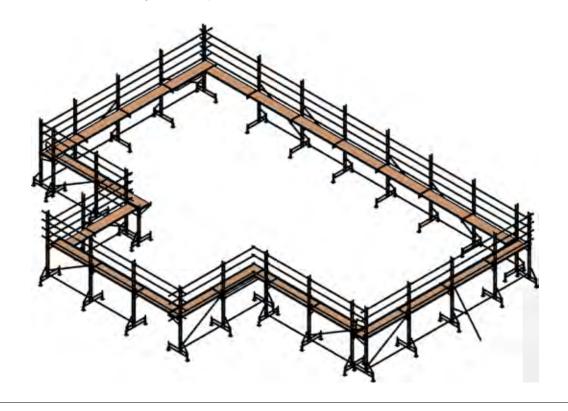

330

REFER TO PAGES 121 - 122 EASY SYSTEM COMPONENTS LIST



# **MINI MOBILE SAFEROOF**


### **FEATURES & BENEFITS**

- Allows access to both the roof and side walls/fascia at the same time
- Provides a very quick and simple way to scaffold out full buildings while providing roof edge protection simultaneously
- This system allows for 225kg to be placed on every deck
- Stairways can be placed at any end to allow easy access for workers and materials
- Toeboards are required for platforms 2m or higher and outriggers for platforms over 4m high
- Some site regulations require toeboards on platforms regardless of height


















0800 394 222

A STEP ABOVE

### **EASY SYSTEM COMPONENTS**

CODE

ER350.600

DESCRIPTION

6.0m

CODE

ER500.060

DESCRIPTION

0.60m

# **PLATFORM SUPPORT BRACKET EASYRAIL ROOF POST** • Strong and lightweight. Can be joined vertically. Custom length available. • Attaches to the roof post and supports the work platform. Height adjustable. CODE DESCRIPTION AER300.200 2.0m CODE DESCRIPTION AER300.300 3.0m AER610.650 0.65m Cantilever Bracket AER300.400 **BASE FRAME OUTRIGGERS** • Supports the roof post using two internal joining spigots and a brace. • Connect to roof posts and provide extra stability to the system. Must be used every 3 bays minimum. CODE DESCRIPTION CODE DESCRIPTION AER FRAME ORG705 Outrigger **SWIVEL COUPLER** 90° FIXED COUPLERS • Used for attaching guard rails to the posts that are not 90 degrees to it. E.g. • Used for attaching horizontal rails to the posts. gable ends. CODE DESCRIPTION CODE DESCRIPTION SW48 Swivel Coupler FX48 Fixed Coupler **ALUMINIUM EASYRAIL TUBE SCREW JACKS INTERNAL JOINING SPIGOT** Can be cut to specific lengths. Used for toerail, Inserted into the sleeves on Base frames to support Used for joining tubes together end to end by midrail and handrails. Up to 4m span between the system and compensate for uneven ground. expanding inside them. posts.



DESCRIPTION

Internal Joiner

CODE

IN48

# **EASY SYSTEM COMPONENTS**







# SAFE AND SIMPLE ACCESS FOR A PLATFORM HEIGHT OF 1-4 METRES

### **FEATURES & BENEFITS**

- 300mm of baseplate adjustment makes it useable on rough terrain
- Minimal componentry makes it quick and easy to assemble
- 600mm wide platforms are rated to 225kg allowing access for 2 people at once
- Can be used with 3 standard scaffold planks
- Can be used with standard Easy Access 800mm wide H frames for extra height
- 2.4m and 3m bay lengths are available
- Bridging ledgers allow the system to go around a house
- Safety access gate available
- Additional midrails are required on platforms above 1m in height

UTILISE
COMPONENTS
FROM EXISTING
EASY ACCESS
EQUIPMENT



Note: Some sites require midrails on platforms regardless of height.



# **EASYREACH**











# **EASYREACH PACKS**

# STARTER PACK

LLP01 - 2.4	DESCRIPTION	BATCH QTY
LLF800	800 Multi Cross L Frame	2
CBM110	Multi Frame Cross Brace 2.4m	1
PFS435	Standard Platform 2.4m	1
GRB420	Snaplock Guardrail 2.4m	1
BPA605	Adj Base Plate	4
LARG0.5	Ladder Access Gate	1

LLP02 - 3M	DESCRIPTION	BATCH QTY
LLF800	800 Multi Cross L Frame	2
CBM310	Multi Frame Cross Brace 3m	1
PFS440	Standard Platform 3m	1
GRB420	Snaplock Guardrail 2.4m	1
BPA605	Adj Base Plate	4
LARG0.5	Ladder Access Gate	1


- Toeboards are required if the platform is over 2m high
- Timber scaffold planks can be used to create a toe board
- Additional Ladder Access Gates are available to close in corners
- Midrails are required on cross braced bays with platforms above 1m high



### **ADD ON BAYS**

LLP03 - 2.4	DESCRIPTION	BATCH QTY
LLF800	800 Multi Cross L Frame	1
CBM110	Multi Frame cross brace 2.4m	1
PFS435	Standard Platform 2.4m	1
GRB420	Snaplock Guardrail 2.4m	1
BPA 605	Adj Base Plate	2

LLP04 - 3M	M DESCRIPTION	
LLF800	800 Multi Cross L Frame	1
CBM310	Multi Frame Cross Brace 3m	1
PFS440	Standard Platform 3m	1
GRB430	Snaplock Guardrail 3m	1
BPA605	Adj Base Plate	2

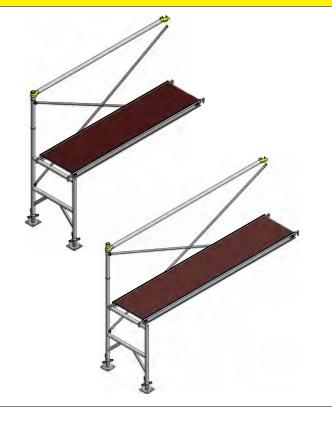

6

# **EASYREACH PACKS**

### 14.4/18M STRAIGHT PACK

LLP05 - 14.4M	DESCRIPTION	BATCH QTY
LLF800	800 Multi Cross L Frame	7
CBM110	Multi Frame Cross Brace 2.4m	6
PFS435	Standard Platform 2.4m	6
GRB420	Snaplock Guardrail 2.4m	6
BPA605	Adj Base Plate	14
LLP06 - 18M	DESCRIPTION	BATCH QTY
LLF800	800 Multi Cross L Frame	
CBM310	Multi Frame Cross Brace 3m	6
PFS440	Standard Platform 3m 6	

Snaplock Guardrail 3m

Adj Base Plate



### **60M HOUSE-LOT**

GRB430

BPA605

LLP07 - 60M	DESCRIPTION	BATCH QTY
LLF800	800 Multi Cross L Frame	20
CBM110	Multi Frame Cross Brace 2.4m	10
PFS435	Standard Platform 2.4	10
GRB420	Snaplock Guardrail 2.4	10
BPA605	Adj Base Plate	40
CBM310	Multi Frame Cross Brace 3m	6
PFS440	Standard Platform 3m	10
GRB430	Snaplock Guardrail 3m 1	
IHP	Intermediate Handrail Post	4
LAG0.5	Self Closing Swing Gate	
GRL300	RL300 3.0m Reinforced Grasper Ledger	





# **EASYREACH COMPONENTS**

ACCESS FRAME		BPA605 ADJUSTABLE BASE JACK		SNAPLOCK GUARDRAIL	
	/ 1			CODE	DESCRIPTION
	1			GRB410	Snaplock Guardrail 1.0m
				GRB415	Snaplock Guardrail 1.5m
CODE	DESCRIPTION	CODE	DESCRIPTION	GRB420	Snaplock Guardrail 2.4m
LLF800	Access Frame	BPA605	Adjustable Base Jack	GRB430	Snaplock Guardrail 3.0m
REINFORG	CED SNAPLOCK LEDGER	SELF-CLO	SING SWING GATE	PLATFORI	MS
				P	
				CODE	DESCRIPTION
CODE	DESCRIPTION			PFS410	Standard Platform 1.0m
	DESCRIPTION  2 Am Painforced Grasper Ladger	CODE	DESCRIPTION	PFS410 PFS415	Standard Platform 1.0m Standard Platform 1.5m
GRL240	2.4m Reinforced Grasper Ledger	CODE	DESCRIPTION Ladder Access Gate	PFS410 PFS415 PSF435	Standard Platform 1.0m Standard Platform 1.5m Standard Platform 2.4m
CODE GRL240 GRL300 ALUMINIU		CODE LAG0.5 SCREW JA	Ladder Access Gate	PFS410 PFS415 PSF435 PSF440	Standard Platform 1.0m Standard Platform 1.5m
GRL240 GRL300	2.4m Reinforced Grasper Ledger     3.0m Reinforced Grasper Ledger	LAG0.5	Ladder Access Gate	PFS410 PFS415 PSF435 PSF440	Standard Platform 1.0m Standard Platform 1.5m Standard Platform 2.4m Standard Platform 3.0m
GRL240 GRL300	2.4m Reinforced Grasper Ledger     3.0m Reinforced Grasper Ledger	LAG0.5	Ladder Access Gate	PFS410 PFS415 PSF435 PSF440	Standard Platform 1.0m Standard Platform 1.5m Standard Platform 2.4m Standard Platform 3.0m



DISTRIBUTED BY



Retex is a durable, reusable, and 100% recyclable protective board made from recycled textile waste.

Originally developed for the construction industry,
Retex is now used across a wide range of applications including window and door protection, scaffolding wrap, temporary signage, and transport packaging. Proudly made in New Zealand, Retex helps reduce landfill waste while delivering reliable, cost-effective protection.



THE FUTURE OF BUILDING SURFACE PROTECTION



### RETEX

### **FEATURES & BENEFITS**

Retex provides surface protection made from recycled materials, effectively safeguarding against damage. Crafted from recycled textile waste, such as high-vis and end-of-life workwear, Retex blends sustainability with durability.

### **APPLICATIONS**

- Flooring protection
- Window protection
- Door protection
- Scaffold/Bollard protection

# **PHYSICAL PROPERTIES**

- Impact resistant
- Easy to cut, bend, glue, tape or screw
- ─ 100% recyclable & reusable
- → Insulating properties
- → Durable
- → Internal & External use
- → Acoustically tested to reduce noise





SCAN ME to view the technical data sheet

CODE	DESCRIPTION	SIZE	WEIGHT	M²
RTX920	Rigid Roll Form 3-5mm	3-5mm x 0.9m x 20m	10.8kg	18
RTX1220	Rigid Roll Form 3-5mm	3-5mm x 1.2m x 20m	14.4kg	24
RTX1015S	Soft Roll	10mm x 1.2m x 15m	12.6kg	18

 $<sup>\</sup>ensuremath{^{\star}}$  For custom specifications please contact Easy Access for lead times and MOQs





**10kgs** of recycled textile waste per roll



**6.5 tonnes** of textile waste diverted in past year for Retex



Designed, manufactured & recycled in NZ



Multi - purpose not limited to building protection



Hard wearing & durable

# RETEX

### **TESTIMONIALS**

### Naylor Love


### **Turnball Library Restoration**

"Retex was chosen because it could be used to line the walls of the building as the restoration progressed, providing some acoustic and thermal properties."

### The Craftsmen

### (Taupo)

"Easy to use and the fact that it could be used outside. Retex in action protecting a TPO membrane roof installation, while the builders worked on the roof."

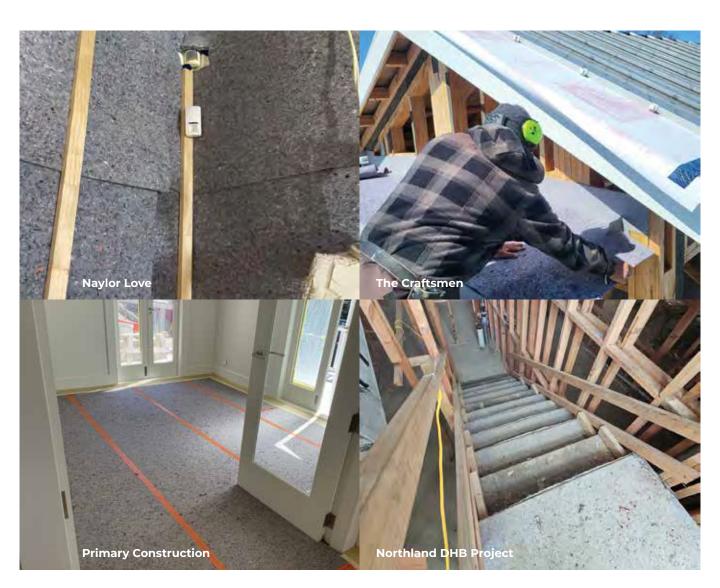

# **Primary Construction**

### **Graeme Tyler**

"Both areas have been down for 5 months. Such a great product for the exterior, easy to cut around structures and has lasted so good through all the elements that a coastal building is put through."


### Argon

### **Northland DHB Project**

"RTX920 used on the open stairs, the product was open to the elements - sun, wind and rain for 6 months. The product has lasted an extremely long time and is now ready to be replaced."



# **RETEX DISPLAYS**

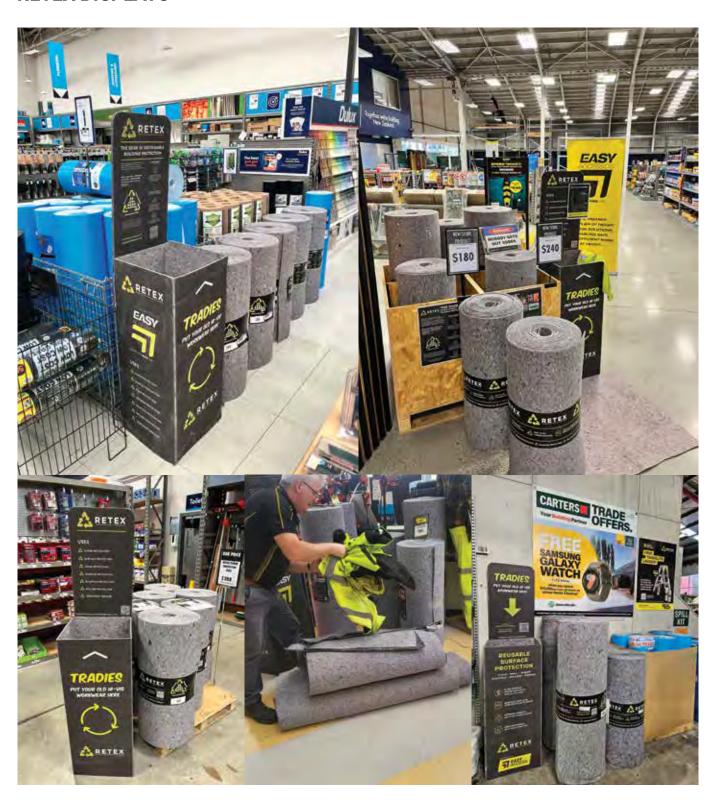



**10kgs** of recycled textile waste per roll



**6.5 tonnes** of textile waste diverted in past year for Retex



100% recyclable and can be recycled infinitely by us



Designed, manufactured & recycled in NZ




Multi - purpose not limited to building protection



Hard wearing & durable

# RETEX

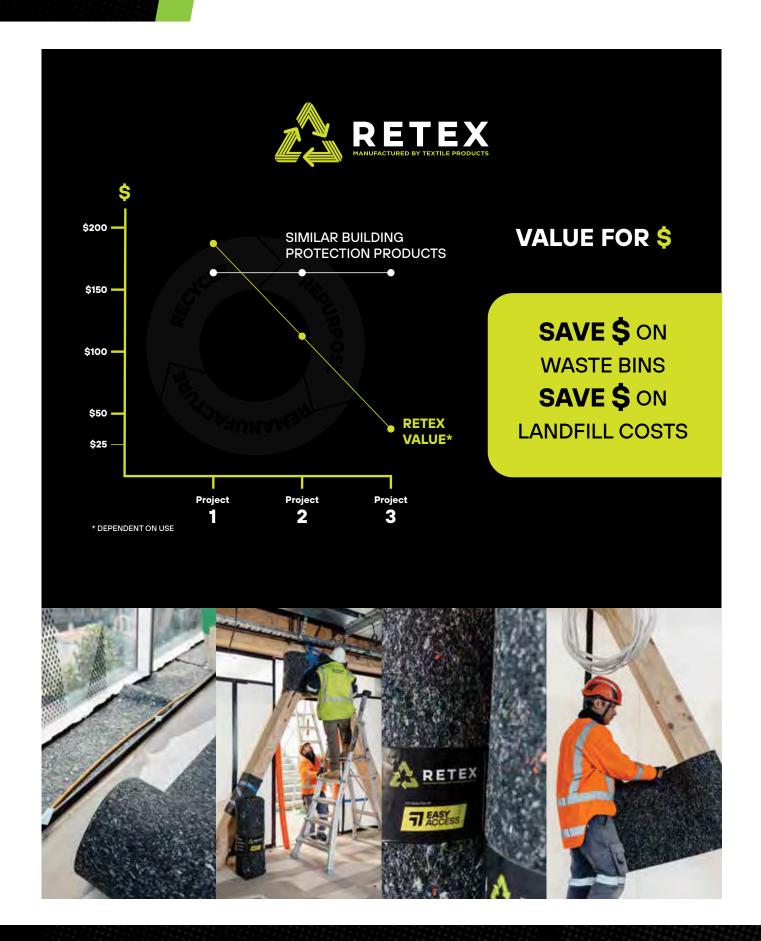





### EASY ACCESS CO SALES AND SERVICE POLICY FOR STORES

### **HOW CAN WE HELP YOU?**

Our Customer Care team is available via phone or email during our regular office hours shown below. We will answer any of your questions and help to make it easy for you sell Easy Access products to your customers.

Alternatively, you may find what you need on our website, where all of our products are profiled. Our website also provides you with:

- Downloadable Assembly Instructions
- Helpful Info Sheets
- Show-Me and How-To Product Videos

### **CUSTOMER SERVICE HOURS AND CONTACT DETAILS**

MONDAY - FRIDAY (Excluding public holidays) - 7AM - 5PM

Phone: 0800 394 222 or +64 9 431 1055

Email: sales@easyaccess.co.nz Web: www.easyaccess.co.nz

### **ENTERING ORDERS:**

Here at Easy Access Co. we are delighted to offer you easy ordering; simply send in an order via the below method before 10am and we will aim to dispatch your goods the same day! This excludes products that are made to order, which will have a longer lead-time.

For prompt entry of your orders:

- Email to sales@easyaccess.co.nz
- Call us on 0800 394 222

You will receive a email back with an order confirmation when the order has been entered into our system. If there is an item on back order this will be noted on the order confirmation along with an estimated due date. In the case that the due date changes again we will endeavor to keep you updated with a phone call.

### **RETURNS**

Easy Access Co. is happy to accept product back if your customer changes their mind and cancels the order. Unless sent in error by Easy Access Co, goods returned for credit will incur a restocking fee of 5% of the product value or minimum \$10.00 charge, whichever is greater. In such cases, the return freight costs may also be on-charged. Note; this offer applies to stocked standard product only.

### FREIGHT-DAMAGED PRODUCTS

In the event that you receive an item or items that have been damaged in transit, Easy Access Co. is happy to replace the affected item/s providing it has been signed for as damaged on the Proof of Delivery. It is the responsibility of the receiver to check all deliveries thoroughly, sign for them appropriately and to advise us within 24 hours of receipt of the damaged goods.

Should a damaged product be discovered after signing for delivery, please contact us as soon as possible. While we will be unable to claim with the freight company, we may be able to provide another suitable resolution such as a discount on replacement items.

### **CREDIT REQUESTS**

Please contact us should you require a credit for any reason. After gathering details we will issue a credit if deemed justifiable, or advise otherwise. We will be happy to discuss alternative solutions at the time.

Credit requests for faulty items - we will look into and replace any still within their warranty free of charge. Some products may require inspection before a replacement is sent or the product is repaired.

### INVOICES AND STATEMENTS

If you are currently receiving invoices and statements by post and would prefer it to via email, simply email accounts@easyaccess.co.nz with your preferred email address and we will update our system.

### **BROCHURES AND PRICELISTS**

We offer free marketing materials on our products. Contact us if you would like to receive these in either hard copy or email. Make sure you are on our mailing list for regular promotions that you can use to provide your customers with super special deals for Easy Access equipment.



# **RESOURCES AND ASSISTANCE**FOR TRADES, AND USERS OF HEIGHT ACCESS PRODUCTS

While we offer our height access products for sale exclusively through our network of trade stores throughout New Zealand, we love to talk directly to the end users of our products. Please contact us to offer your feedback, or ask us for advice or assistance.

### WHAT PRODUCT IS BEST FOR ME?

We can help you to decide which of the vast range of Easy Access products may be best for you. **Contact Us** and we will talk you through it over the phone, or arrange a **FREE visit to your site**.

#### **HOW DO I ASSEMBLE MY EASY ACCESS PRODUCT?**

**How-To Videos** are available on our website. **Instruction sheets** can also be downloaded from there, or **Contact Us** to have them sent to you, or to arrange onsite installation training for you and your staff.

### WHERE CAN I VIEW OR BUY EASY ACCESS PRODUCTS?

Our website has a **STORES** page. You can select your region to find where you can buy Easy Access products near you. Or **Contact Us** by **email** or **phone** if you would like us to provide you with the product code, where near you it is most likely to be in stock, and an indication of the price.

### I HAVE A SUGGESTION

Great! We love feedback. If you have a suggested improvement to a product, or perhaps an idea for a new product, please **Contact Us**. If your suggestion solves a height access challenge not currently met - our NZ-based Design, Development and Production teams would love to know about it.

#### CAN I PURCHASE INDIVIDUAL COMPONENTS?

Most Easy Access products are part of a modular interchangeable system. Easy Access Components are profiled within the relevant sections in this catalogue. **Contact Us** if you need a replacement part on our products.

### HEIGHT ACCESS SAFETY TRAINING

Keeping up with regulatory and site-specific safety standards can be complex - we are here to help.

Contact Us if you would like us to arrange FREE onsite height access training or if you require clarification on Safety standards and regulations.

### WHAT SPECIAL OFFERS ARE AVAILABLE FOR EASY ACCESS PRODUCTS RIGHT NOW?

Easy Access products are occasionally available on promotional deals which have been jointly arranged between Easy Access and our distributor network. **Contact Us** or visit our **website** to register for email updates on upcoming specials and product offers.

# DOES EASY ACCESS MODIFY OR MANUFACTURE BESPOKE PLATFORMS TO SUIT MY EXACT HEIGHT ACCESS SITUATION?

We certainly do. **Contact Us** with your challenge and we will design, draw and fabricate a platform or product that will meet your requirements.

### **WE WOULD LOVE TO HEAR FROM YOU!**

CALL US 0800 394 222 EMAIL US

sales@easyaccess.co.nz

VISIT OUR WEBSITE

www.easyaccess.co.nz

CONNECT WITH US ON SOCIAL MEDIA









# HEAD OFFICE MANUFACTURING AND NORTHERN DISTRIBUTION

334 Main Highway 12, Maungaturoto, New Zealand PO Box 62, Maungaturoto Northland, New Zealand 0547

# SOUTHERN DISTRIBUTION CENTRE

9 Venning Crescent, Cromwell 9310

FREEPHONE 0800 394 222 P +64 9 431 1055 F +64 9 431 8110

www.easyaccess.co.nz

